



多摩川 直轄河川改修事業

令和8年7月

国土交通省 関東地方整備局






様式－1 氾濫ブロック分割図

水系名：多摩川

河川名：多摩川、浅川

対象河道：整備完了後(R37)

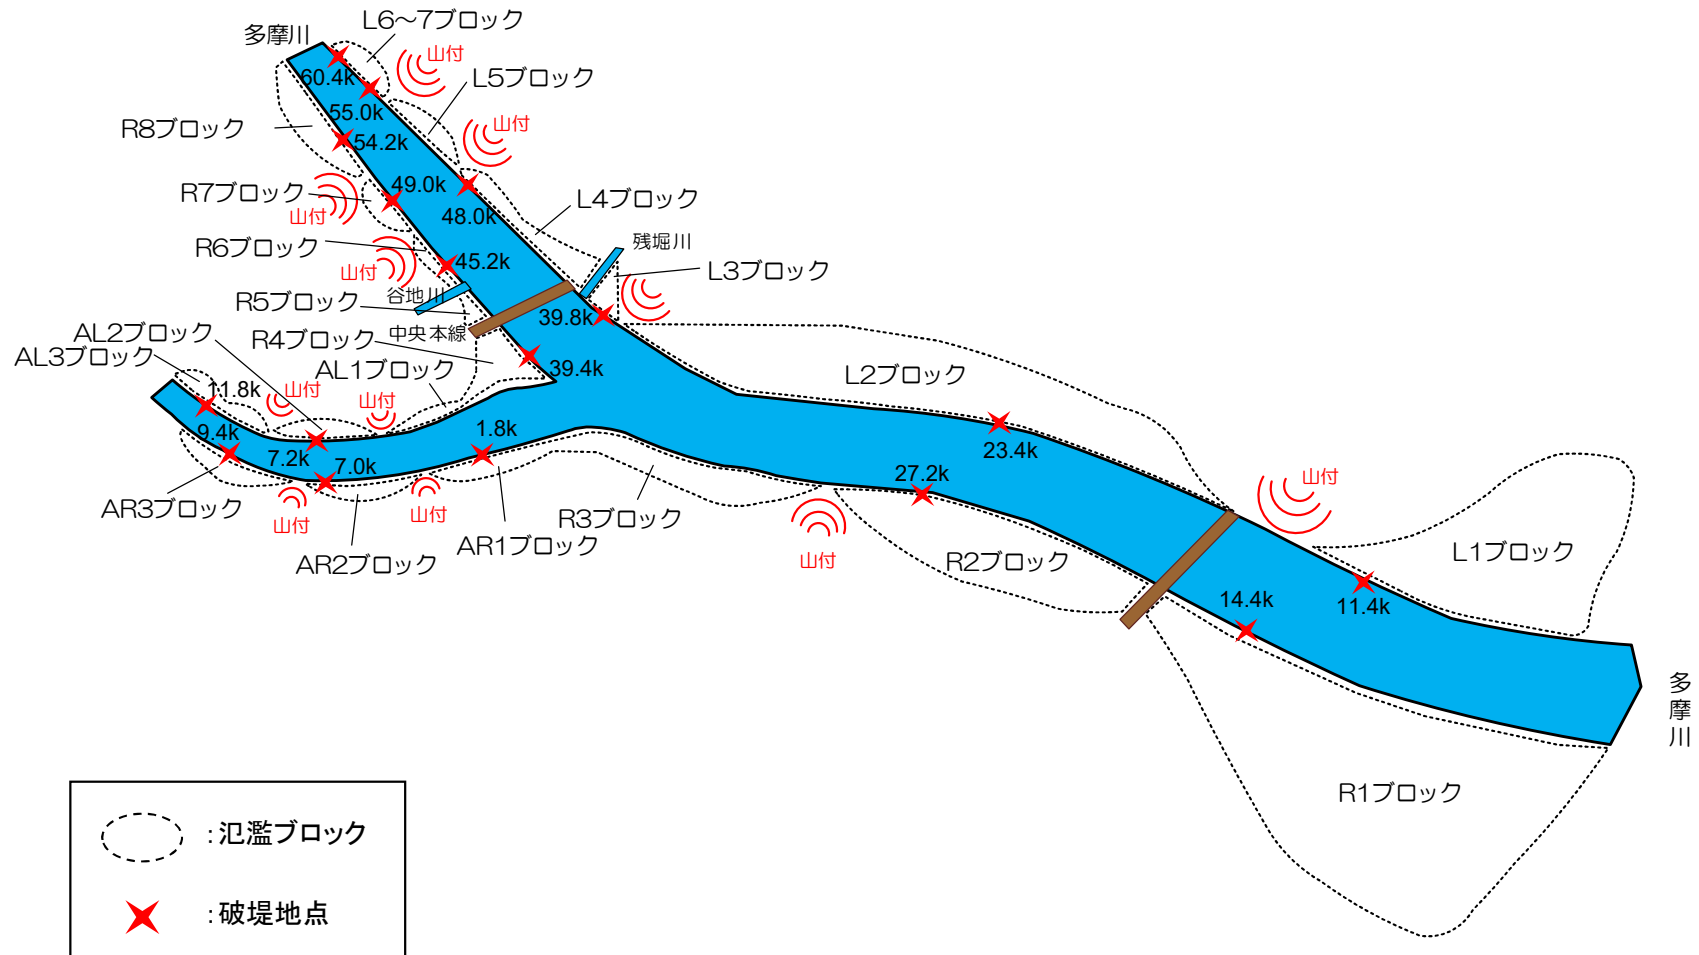

※) 基本方針規模(多摩川W=1/200、
浅川W=1/100)における破堤地点

様式ー2
 資産データ
 水系名:多摩川
 河川名:多摩川、浅川
 国勢調査年:令和2年
 事業所統計調査年:令和3年

(単位:億円)

氾濫 ブロック	ブロック 面積 (ha)	一般資産等基礎数量							一般資産額							農作物資産			一般資産額等 合計	備考
		人口 (人)	世帯数 (世帯)	従業者数(人) (産業分類別に算 出)	農漁家数 (世帯)	延床面積 (千㎡)	水田面積 (ha)	畑面積 (ha)	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計		
											償却	在庫	償却	在庫						
L1	3,936.50	792,969	426,949	386,386	391	37,829.97	0.00	0.00	123,683	54,945	14,876	7,547	12	4	201,067	0	0	0	201,067	
L2	6,376.30	732,214	356,441	285,006	1,434	30,058.76	33.60	66.14	100,217	45,875	9,528	4,805	45	14	160,484	0	3	4	160,487	
L3	546.70	50,318	26,438	61,332	42	2,358.66	0.00	1.05	7,740	3,403	2,465	959	1	0	14,569	0	0	0	14,569	
L4	1,081.20	94,150	43,660	33,089	206	4,306.83	4.59	21.72	14,425	5,619	1,323	633	6	2	22,008	0	1	1	22,010	
L5	561.90	44,597	22,193	12,857	88	1,937.40	0.00	4.27	6,349	2,856	523	253	3	1	9,986	0	0	0	9,986	
L6	191.00	9,795	4,090	1,747	54	515.20	7.35	0.00	1,705	526	79	31	2	1	2,344	0	0	0	2,344	
L7	16.90	731	325	253	1	42.71	0.00	0.00	158	42	5	3	0	0	208	0	0	0	208	
R1	7,571.90	945,254	471,681	426,615	602	39,985.75	1.05	40.55	109,399	60,703	17,057	9,220	19	6	196,402	0	2	2	196,404	
R2	3,903.60	463,778	228,710	129,044	851	19,539.43	5.25	45.14	54,688	29,436	4,450	2,417	27	8	91,025	0	2	2	91,027	
R3	2,071.90	137,844	66,370	41,910	293	6,178.35	10.43	13.65	19,301	8,542	1,304	551	9	3	29,709	0	1	1	29,710	
R4	631.40	54,944	25,613	15,325	122	2,037.66	0.00	8.40	6,826	3,297	445	225	4	1	10,797	0	0	0	10,797	
R5	134.40	11,087	5,248	2,275	31	440.69	6.30	9.38	1,485	675	65	33	1	0	2,259	0	1	1	2,260	
R6	318.60	16,011	6,610	5,327	64	622.03	0.00	5.45	1,929	851	147	88	2	1	3,018	0	0	0	3,018	
R7	656.00	16,257	6,774	5,718	107	732.54	56.89	19.95	2,430	872	208	137	3	1	3,651	1	1	1	3,653	
R8	65.10	982	367	225	3	45.18	0.00	3.15	158	47	6	3	0	0	214	0	0	0	214	
AL1	631.40	54,944	25,613	15,325	122	2,037.66	0.00	8.40	6,826	3,297	445	225	4	1	10,797	0	0	0	10,797	
AL2	117.00	7,268	3,244	1,053	15	299.28	1.05	20.21	1,004	417	28	11	1	0	1,461	0	1	1	1,462	
AL3	484.90	34,065	16,545	9,907	64	1,607.63	0.00	35.24	5,140	2,129	326	221	2	1	7,819	0	2	2	7,821	
AR1	2,071.60	137,839	66,367	41,896	293	6,177.99	10.43	13.65	19,300	8,542	1,303	550	9	3	29,707	0	1	1	29,708	
AR2	555.40	36,985	18,449	10,049	65	1,715.88	0.00	0.00	5,345	2,374	563	223	2	1	8,508	0	0	0	8,508	
AR3	510.90	67,435	37,371	59,995	56	3,268.86	0.00	0.00	10,180	4,810	2,403	890	2	1	18,285	0	0	0	18,285	
合計	32,434.60	3,709,468	1,859,059	1,545,335	4,904	161,738.46	136.94	316.35	498,289	239,256	57,549	29,024	153	48	824,319	1	16	17	824,336	

様式-3		被害額(現況時)						水系名:多摩川			河川名:多摩川			流量規模:1/10				(単位:百万円)		
氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
L1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L4	1,497	539	305	98	0	0	2,440	0	0	0	1,824	384	111	57	169	18	34	604	4,868	
L5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L6	486	181	20	3	1	1	691	1	0	1	565	9	11	7	17	2	11	40	1,296	
L7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R8	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
合計	1,983	720	325	101	1	1	3,131	1	0	1	2,389	393	122	64	186	20	45	643	6,165	

様式-3		被害額(現況時)						水系名:多摩川			河川名:多摩川			流量規模:1/30					(単位:百万円)	
氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施設等被害額	営業停止 損失	家庭における応急対策費用			事業所における応急 対策費用	その他の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
L1	24,870	35,454	3,560	2,341	6	3	66,235	0	0	0	49,146	4,087	6,428	3,428	9,855	1,005	2,209	17,156	132,537	
L2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L4	11,732	7,403	1,974	579	6	3	21,697	1	3	4	16,196	663	1,195	643	1,838	130	461	3,092	40,989	
L5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L6	953	289	37	8	2	1	1,289	1	0	1	1,066	13	26	13	39	6	18	77	2,433	
L7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R1	74,915	109,936	12,971	6,212	27	15	204,076	0	0	0	151,424	16,928	16,219	9,268	25,487	2,589	6,849	51,853	407,352	
R2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R7	6	3	0	0	0	0	9	1	6	7	166	0	0	0	1	0	0	1	183	
R8	373	95	10	2	0	0	480	0	0	0	356	4	29	14	43	2	6	55	891	
合計	112,849	153,179	18,552	9,143	41	22	293,785	3	9	13	218,354	21,695	23,898	13,366	37,264	3,732	9,543	72,234	584,385	

様式-3		被害額(現況時)						水系名:多摩川			河川名:多摩川			流量規模:1/70					(単位:百万円)	
氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施設等被害額	営業停止 損失	家庭における応急対策費用			事業所における応急 対策費用	その他の間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
L1	121,675	144,850	15,310	9,917	24	12	291,789	0	0	0	216,507	15,831	25,758	13,501	39,258	4,340	9,024	68,454	576,749	
L2	63,318	61,015	5,936	2,472	39	22	132,802	0	5	5	98,585	916	5,416	3,071	8,487	1,010	3,801	14,214	245,605	
L3	672	385	141	88	0	0	1,286	0	0	0	954	17	23	14	36	15	24	93	2,332	
L4	18,803	13,745	2,823	905	9	5	36,290	1	10	11	27,100	829	1,720	971	2,692	209	856	4,585	67,986	
L5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L6	2,783	859	77	22	6	2	3,749	2	0	2	2,895	33	78	37	115	21	54	222	6,869	
L7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R1	275,929	432,052	41,406	21,325	66	35	770,812	0	0	0	571,948	34,609	43,487	26,528	70,015	7,612	26,917	139,153	1,481,912	
R2	59,676	72,170	5,285	3,033	28	17	140,209	0	10	10	104,145	2,475	12,102	6,734	18,836	1,281	4,496	27,088	271,451	
R3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R4	1,597	379	90	41	0	0	2,108	0	0	0	1,564	37	224	104	327	21	24	409	4,080	
R5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R7	17	11	0	0	0	0	29	1	9	10	233	0	1	1	1	0	1	2	274	
R8	2,316	1,537	69	20	4	1	3,947	0	0	0	2,929	11	138	62	200	22	96	329	7,205	
合計	546,786	727,003	71,136	37,823	176	94	1,383,019	4	33	38	1,026,859	54,757	88,945	51,021	139,967	14,531	45,292	254,547	2,664,463	

様式-3		被害額(現況時)						水系名:多摩川			河川名:多摩川			流量規模:1/100						(単位:百万円)	
氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施設等被害額	営業停止 損失	家庭における応急対策費用			事業所における応急 対策費用	その他の間接被害	小計	合計	備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計						
			償却	在庫	賠償	在庫															
L1	199,781	229,460	23,241	14,311	33	17	466,842	0	0	0	346,392	25,967	38,902	21,054	59,956	6,566	14,295	106,784	920,018		
L2	77,526	77,031	7,584	3,136	56	31	165,364	0	5	5	122,748	1,091	6,320	3,592	9,912	1,290	4,799	17,092	305,209		
L3	805	441	175	112	0	0	1,532	0	0	0	1,137	21	30	16	46	22	27	116	2,785		
L4	19,485	14,784	2,935	941	10	6	38,161	1	10	11	28,489	855	1,791	1,012	2,802	221	921	4,800	71,461		
L5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
L6	2,986	920	81	24	6	2	4,020	2	0	2	3,097	35	83	39	122	23	57	238	7,356		
L7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R1	336,436	539,232	52,234	26,602	80	42	954,626	0	0	0	708,323	38,148	52,243	31,335	83,577	10,032	33,595	165,352	1,828,301		
R2	78,814	104,741	7,461	4,328	44	26	195,414	0	11	12	145,118	3,111	14,552	8,326	22,877	1,691	6,525	34,205	374,749		
R3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R4	6,476	5,395	456	246	1	1	12,575	0	0	0	9,331	203	690	394	1,084	64	336	1,688	23,593		
R5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R6	1,878	1,348	475	311	0	0	4,012	0	0	0	2,977	57	96	58	154	45	84	340	7,329		
R7	21	13	0	0	0	0	35	2	10	11	248	0	1	1	2	0	1	3	297		
R8	2,489	1,610	75	22	4	1	4,202	0	0	0	3,118	14	149	66	215	25	100	355	7,674		
合計	726,697	974,976	94,717	50,033	236	126	1,846,784	5	36	41	1,370,976	69,502	114,856	65,892	180,748	19,979	60,742	330,971	3,548,772		

様式-3 被害額(現況時) 水系名:多摩川 河川名:多摩川 流量規模:1/200 (単位:百万円)

氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
L1	388,795	495,428	44,256	26,228	65	33	954,805	0	0	0	708,473	40,270	64,527	36,655	101,182	11,933	30,866	184,251	1,847,529	
L2	108,760	110,634	14,351	5,583	98	51	239,476	0	5	5	177,742	9,794	9,406	5,078	14,484	2,364	6,893	33,534	450,757	
L3	1,010	490	211	145	0	0	1,856	0	0	0	1,377	26	39	19	57	28	31	143	3,376	
L4	21,189	16,399	3,337	1,075	13	7	42,020	1	11	12	31,357	950	1,915	1,079	2,994	245	1,022	5,210	78,599	
L5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L6	3,428	1,056	91	28	7	3	4,612	2	0	2	3,536	38	95	43	138	27	66	269	8,418	
L7	34	6	3	2	0	0	46	0	0	0	34	0	1	1	2	0	0	2	82	
R1	485,651	785,672	73,273	34,461	117	62	1,379,237	0	2	2	1,023,409	71,402	88,173	52,207	140,380	14,549	48,947	275,278	2,677,925	
R2	115,346	168,646	11,773	6,815	78	44	302,702	0	12	13	224,727	4,085	18,878	11,159	30,037	2,517	10,507	47,146	574,587	
R3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R4	12,745	13,042	1,002	518	4	2	27,313	0	1	1	20,275	322	1,196	706	1,902	151	812	3,188	50,776	
R5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R6	2,605	2,122	704	421	0	0	5,852	0	0	0	4,342	78	138	79	217	81	132	509	10,704	
R7	364	41	94	48	0	0	547	0	0	0	406	26	15	7	23	3	3	54	1,007	
R8	2,643	1,695	89	23	4	1	4,456	0	0	0	3,306	19	162	70	232	27	106	384	8,146	
合計	1,142,570	1,595,231	149,183	75,347	385	203	2,962,920	3	32	35	2,198,984	127,011	184,543	107,104	291,648	31,926	99,383	549,968	5,711,907	

様式-3

被害額(現況時)

水系名: 多摩川

河川名: 浅川

流量規模: 1/7

(単位: 百万円)

氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所 における 応急 対策費用	その他 の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
AL1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
AL2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
AL3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
AR1	13,724	8,271	1,423	501	2	1	23,922	1	0	1	17,868	781	1,189	644	1,833	146	515	3,275	45,066	
AR2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
AR3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
合計	13,724	8,271	1,423	501	2	1	23,922	1	0	1	17,868	781	1,189	644	1,833	146	515	3,275	45,066	

様式-3

被害額(現況時)

水系名: 多摩川

河川名: 浅川

流量規模: 1/10

(単位: 百万円)

氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所 における 応急 対策費用	その他 の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
AL1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AL2	16	3	1	0	0	0	21	0	0	0	16	0	2	1	3	0	0	4	40	
AL3	24	4	1	1	0	0	30	0	0	0	22	0	4	2	6	1	0	7	60	
AR1	25,193	19,647	4,039	1,373	5	3	50,260	1	0	1	37,415	2,719	2,385	1,337	3,722	431	1,224	8,096	95,772	
AR2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AR3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
合計	25,233	19,654	4,041	1,374	5	3	50,311	1	0	1	37,453	2,719	2,392	1,340	3,732	432	1,224	8,107	95,872	

様式-3

被害額(現況時)

水系名: 多摩川

河川名: 浅川

流量規模: 1/30

(単位: 百万円)

氾濫 ブロック	一般資産被害額						農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物			小計	清掃労働 対価	代替 活動等						小計
			償却	在庫	賠償	在庫														
AL1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
AL2	300	156	16	5	0	0	477	0	2	2	382	0	21	12	33	2	10	45	906	
AL3	1,841	935	135	79	0	0	2,991	0	0	0	2,219	36	264	130	394	34	58	523	5,732	
AR1	42,308	39,228	6,759	2,414	13	7	90,729	2	0	2	67,446	4,023	3,827	2,167	5,993	777	2,444	13,237	171,415	
AR2	1,860	1,416	102	48	1	1	3,428	0	0	0	2,543	0	143	86	228	19	88	336	6,306	
AR3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
合計	46,309	41,735	7,012	2,547	14	8	97,624	2	2	4	72,591	4,059	4,254	2,394	6,648	832	2,600	14,140	184,360	

様式-3

被害額(現況時)

水系名: 多摩川

河川名: 浅川

流量規模: 1/70

(単位: 百万円)

氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
AL1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AL2	1,484	685	56	19	0	0	2,245	0	5	5	1,738	0	189	95	283	14	43	340	4,327	
AL3	3,781	2,792	296	175	0	0	7,044	0	0	0	5,227	72	680	354	1,034	74	174	1,354	13,625	
AR1	49,231	46,718	7,809	2,772	16	8	106,553	2	0	2	79,189	4,605	4,394	2,464	6,858	978	2,911	15,351	201,095	
AR2	4,209	3,860	247	120	5	2	8,444	0	0	0	6,265	0	308	173	481	56	241	777	15,486	
AR3	60	7	6	4	0	0	78	0	0	0	58	3	6	3	9	1	0	14	149	
合計	58,765	54,062	8,413	3,090	21	11	124,363	2	5	7	92,476	4,681	5,577	3,088	8,664	1,123	3,368	17,836	234,683	

様式-3

被害額(現況時)

水系名: 多摩川

河川名: 浅川

流量規模: 1/100

(単位: 百万円)

氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
AL1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AL2	2,501	2,211	86	31	1	1	4,832	0	6	6	3,662	0	270	162	432	20	138	590	9,090	
AL3	5,670	4,818	458	263	1	1	11,211	0	1	1	8,327	90	920	501	1,420	102	300	1,913	21,451	
AR1	51,922	49,436	8,160	2,896	17	9	112,440	2	0	2	83,557	4,773	4,598	2,577	7,175	1,039	3,080	16,067	212,066	
AR2	4,810	4,306	282	138	5	3	9,544	0	0	0	7,082	0	339	188	527	65	268	860	17,485	
AR3	243	60	41	10	0	0	354	0	0	0	262	14	72	33	106	7	4	131	747	
合計	65,145	60,831	9,028	3,338	25	13	138,379	2	7	9	102,890	4,878	6,199	3,461	9,661	1,233	3,790	19,561	260,839	

様式-3 被害額(当面7年間の整備後) 水系名:多摩川 河川名:多摩川 流量規模:1/10 (単位:百万円)

氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
L1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
L2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
L3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
L4	1,497	539	305	98	0	0	2,440	0	0	0	1,824	384	111	57	169	18	34	604	4,868	
L5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
L6	486	181	20	3	1	1	691	1	0	1	565	9	11	7	17	2	11	40	1,296	
L7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R8	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
合計	1,983	720	325	101	1	1	3,131	1	0	1	2,389	393	122	64	186	20	45	643	6,165	

様式-3 被害額(当面7年間の整備後) 水系名:多摩川 河川名:多摩川 流量規模:1/30 (単位:百万円)

氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
L1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L4	11,732	7,403	1,974	579	6	3	21,697	1	3	4	16,196	663	1,195	643	1,838	130	461	3,092	40,989	
L5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L6	953	289	37	8	2	1	1,289	1	0	1	1,066	13	26	13	39	6	18	77	2,433	
L7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R1	62,581	90,629	10,547	5,051	24	13	168,845	0	0	0	125,283	13,867	12,719	7,383	20,102	2,058	5,646	41,673	335,802	
R2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R7	6	3	0	0	0	0	9	1	6	7	166	0	0	0	1	0	0	1	183	
R8	308	68	8	2	0	0	386	0	0	0	287	3	27	12	39	2	4	49	722	
合計	75,580	98,392	12,566	5,639	31	17	192,227	3	9	13	142,997	14,547	13,968	8,052	22,019	2,196	6,130	44,892	380,128	

様式-3		被害額(当面7年間の整備後)						水系名:多摩川			河川名:多摩川			流量規模:1/70			(単位:百万円)			
氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施設等被害額	営業停止 損失	家庭における応急対策費用			事業所における応急 対策費用	その他の間接被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
L1	108,904	130,034	13,716	8,995	22	11	261,682	0	0	0	194,169	12,504	22,816	11,888	34,705	3,786	8,101	59,095	514,946	
L2	63,311	61,007	5,936	2,472	39	22	132,787	0	5	5	98,574	916	5,416	3,070	8,486	1,010	3,801	14,213	245,577	
L3	672	385	141	88	0	0	1,286	0	0	0	954	17	23	14	36	15	24	93	2,332	
L4	18,778	13,724	2,812	903	9	5	36,231	1	10	11	27,056	827	1,719	971	2,690	208	855	4,580	67,879	
L5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L6	2,783	859	77	22	6	2	3,749	2	0	2	2,895	33	78	37	115	21	54	222	6,869	
L7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R1	252,066	385,945	37,723	19,494	61	32	695,322	0	0	0	515,936	33,219	41,126	24,891	66,017	6,876	24,045	130,156	1,341,414	
R2	26,945	23,764	1,693	828	8	5	53,243	0	7	7	39,597	659	6,547	3,398	9,945	517	1,480	12,602	105,449	
R3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R4	1,597	379	90	41	0	0	2,108	0	0	0	1,564	37	224	104	327	21	24	409	4,080	
R5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R7	17	11	0	0	0	0	29	1	9	10	233	0	1	1	1	0	1	2	274	
R8	2,291	1,525	68	20	4	1	3,910	0	0	0	2,901	11	136	61	198	22	95	326	7,137	
合計	477,364	617,634	62,257	32,862	150	79	1,190,346	4	31	35	883,878	48,221	78,087	44,434	122,521	12,477	38,479	221,697	2,295,956	

様式-3 被害額(当面7年間の整備後) 水系名:多摩川 河川名:多摩川 流量規模:1/100 (単位:百万円)

氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
L1	179,121	206,047	21,364	13,278	30	15	419,856	0	0	0	311,529	24,039	35,535	19,103	54,638	6,020	12,837	97,533	828,919	
L2	77,519	77,031	7,584	3,136	56	31	165,357	0	5	5	122,742	1,091	6,319	3,592	9,910	1,290	4,799	17,090	305,195	
L3	805	441	175	112	0	0	1,532	0	0	0	1,137	21	30	16	46	22	27	116	2,785	
L4	19,454	14,755	2,932	940	10	6	38,098	1	10	11	28,442	855	1,788	1,010	2,798	220	919	4,794	71,345	
L5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L6	2,986	920	81	24	6	2	4,020	2	0	2	3,097	35	83	39	122	23	57	238	7,356	
L7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R1	317,009	509,068	48,575	24,803	75	39	899,569	0	0	0	667,473	37,015	49,085	29,745	78,830	9,149	31,715	156,710	1,723,752	
R2	54,811	64,346	4,715	2,700	24	15	126,611	0	9	10	94,052	2,233	11,333	6,264	17,597	1,150	4,009	24,989	245,662	
R3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R4	6,476	5,395	456	246	1	1	12,575	0	0	0	9,331	203	690	394	1,084	64	336	1,688	23,593	
R5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R6	1,878	1,348	475	311	0	0	4,012	0	0	0	2,977	57	96	58	154	45	84	340	7,329	
R7	21	13	0	0	0	0	35	2	10	11	246	0	1	1	2	0	1	3	295	
R8	2,463	1,607	75	22	4	1	4,172	0	0	0	3,096	14	149	66	215	24	100	354	7,621	
合計	662,542	880,972	86,433	45,573	208	111	1,675,838	5	34	39	1,244,123	65,563	105,109	60,288	165,397	18,009	54,885	303,854	3,223,853	

様式-3 被害額(当面7年間の整備後) 水系名:多摩川 河川名:多摩川 流量規模:1/200 (単位:百万円)

氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
L1	363,590	453,861	41,099	24,411	59	30	883,050	0	0	0	655,230	38,342	61,694	34,677	96,371	11,305	28,276	174,293	1,712,573	
L2	108,723	110,592	14,335	5,578	98	51	239,377	0	5	5	177,668	9,754	9,396	5,073	14,470	2,361	6,890	33,475	450,526	
L3	1,010	490	211	145	0	0	1,856	0	0	0	1,377	26	39	19	57	28	31	143	3,376	
L4	21,126	16,370	3,332	1,073	13	7	41,919	1	11	12	31,283	950	1,913	1,078	2,991	245	1,020	5,205	78,420	
L5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L6	3,428	1,056	91	28	7	3	4,612	2	0	2	3,536	38	95	43	138	27	66	269	8,418	
L7	34	6	3	2	0	0	46	0	0	0	34	0	1	1	2	0	0	2	82	
R1	482,863	779,338	72,750	34,219	116	62	1,369,349	0	2	2	1,016,070	71,114	87,840	51,993	139,833	14,425	48,552	273,924	2,659,345	
R2	94,867	131,628	9,326	5,374	58	33	241,286	0	12	12	179,158	3,547	16,672	9,677	26,349	2,076	8,200	40,173	460,629	
R3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R4	12,745	13,042	1,002	518	4	2	27,313	0	1	1	20,275	322	1,196	706	1,902	151	812	3,188	50,776	
R5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R6	2,605	2,122	704	421	0	0	5,852	0	0	0	4,342	78	138	79	217	81	132	509	10,704	
R7	364	41	94	48	0	0	547	0	0	0	406	26	15	7	23	3	3	54	1,007	
R8	2,618	1,684	86	23	4	1	4,416	0	0	0	3,277	18	161	70	231	27	105	381	8,074	
合計	1,093,973	1,510,230	143,031	71,841	359	188	2,819,622	3	31	34	2,092,657	124,216	179,160	103,423	282,583	30,730	94,087	531,616	5,443,929	

様式-3

被害額(当面7年間の整備後)

水系名:多摩川

河川名:浅川

流量規模:1/7

(単位:百万円)

氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
AL1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
AL2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
AL3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
AR1	13,724	8,271	1,423	501	2	1	23,922	1	0	1	17,868	781	1,189	644	1,833	146	515	3,275	45,066	
AR2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
AR3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
合計	13,724	8,271	1,423	501	2	1	23,922	1	0	1	17,868	781	1,189	644	1,833	146	515	3,275	45,066	

様式-3

被害額(当面7年間の整備後)

水系名:多摩川

河川名:浅川

流量規模:1/10

(単位:百万円)

氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所 における 応急 対策費用	その他 の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
AL1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AL2	16	3	1	0	0	0	21	0	0	0	16	0	2	1	3	0	0	4	40	
AL3	24	4	1	1	0	0	30	0	0	0	22	0	4	2	6	1	0	7	60	
AR1	25,193	19,647	4,039	1,373	5	3	50,260	1	0	1	37,415	2,719	2,385	1,337	3,722	431	1,224	8,096	95,772	
AR2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AR3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
合計	25,233	19,654	4,041	1,374	5	3	50,311	1	0	1	37,453	2,719	2,392	1,340	3,732	432	1,224	8,107	95,872	

氾濫 ブロック	一般資産被害額						農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物			小計	清掃労働 対価	代替 活動等						小計
			償却	在庫	賠償	在庫														
AL1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AL2	300	156	16	5	0	0	477	0	2	2	382	0	21	12	33	2	10	45	906	
AL3	1,841	935	135	79	0	0	2,991	0	0	0	2,219	36	264	130	394	34	58	523	5,732	
AR1	42,308	39,228	6,759	2,414	13	7	90,729	2	0	2	67,446	4,023	3,827	2,167	5,993	777	2,444	13,237	171,415	
AR2	1,860	1,416	102	48	1	1	3,428	0	0	0	2,543	0	143	86	228	19	88	336	6,306	
AR3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
合計	46,309	41,735	7,012	2,547	14	8	97,624	2	2	4	72,591	4,059	4,254	2,394	6,648	832	2,600	14,140	184,360	

様式-3

被害額(当面7年間の整備後)

水系名:多摩川

河川名:浅川

流量規模:1/70

(単位:百万円)

氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
AL1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AL2	1,484	685	56	19	0	0	2,245	0	5	5	1,738	0	189	95	283	14	43	340	4,327	
AL3	3,781	2,792	296	175	0	0	7,044	0	0	0	5,227	72	680	354	1,034	74	174	1,354	13,625	
AR1	49,231	46,718	7,809	2,772	16	8	106,553	2	0	2	79,189	4,605	4,394	2,464	6,858	978	2,911	15,351	201,095	
AR2	4,209	3,860	247	120	5	2	8,444	0	0	0	6,265	0	308	173	481	56	241	777	15,486	
AR3	60	7	6	4	0	0	78	0	0	0	58	3	6	3	9	1	0	14	149	
合計	58,765	54,062	8,413	3,090	21	11	124,363	2	5	7	92,476	4,681	5,577	3,088	8,664	1,123	3,368	17,836	234,683	

様式-3

被害額(当面7年間の整備後)

水系名:多摩川

河川名:浅川

流量規模:1/100

(単位:百万円)

氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
AL1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AL2	2,501	2,211	86	31	1	1	4,832	0	6	6	3,662	0	270	162	432	20	138	590	9,090	
AL3	5,670	4,818	458	263	1	1	11,211	0	1	1	8,327	90	920	501	1,420	102	300	1,913	21,451	
AR1	51,922	49,436	8,160	2,896	17	9	112,440	2	0	2	83,557	4,773	4,598	2,577	7,175	1,039	3,080	16,067	212,066	
AR2	4,810	4,306	282	138	5	3	9,544	0	0	0	7,082	0	339	188	527	65	268	860	17,485	
AR3	243	60	41	10	0	0	354	0	0	0	262	14	72	33	106	7	4	131	747	
合計	65,145	60,831	9,028	3,338	25	13	138,379	2	7	9	102,890	4,878	6,199	3,461	9,661	1,233	3,790	19,561	260,839	

様式-3 被害額(整備完了後) 水系名:多摩川 河川名:多摩川 流量規模:1/10 (単位:百万円)

氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
L1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
L2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
L3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
L4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
L5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
L6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
L7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R8	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
合計	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		

様式-3 被害額(整備完了後) 水系名:多摩川 河川名:多摩川 流量規模:1/30 (単位:百万円)

氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
L1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
L2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
L3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
L4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
L5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
L6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
L7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
R8	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
合計	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		

様式-3 被害額(整備完了後) 水系名:多摩川 河川名:多摩川 流量規模:1/70 (単位:百万円)

[illegible]

様式-3

被害額(整備完了後)

水系名:多摩川

河川名:多摩川

流量規模:1/100

(単位:百万円)

氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
L1	116,334	139,784	14,862	9,766	23	12	280,781	0	0	0	208,340	14,983	24,326	12,745	37,071	4,135	8,709	64,898	554,019	
L2	62,446	59,904	5,814	2,433	37	21	130,656	0	5	5	96,993	920	5,417	3,056	8,473	1,009	3,732	14,134	241,788	
L3	14	2	2	1	0	0	18	0	0	0	13	1	1	1	2	0	0	3	34	
L4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R1	201,110	295,715	32,061	16,353	54	28	545,321	0	0	0	404,629	31,405	36,165	21,255	57,420	5,896	18,423	113,143	1,063,093	
R2	12,764	10,522	818	393	4	2	24,503	0	3	3	18,232	271	3,494	1,745	5,239	280	656	6,445	49,183	
R3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R8	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
合計	392,668	505,927	53,556	28,946	118	63	981,278	0	8	8	728,207	47,579	69,404	38,801	108,205	11,321	31,519	198,624	1,908,117	

様式-3 被害額(整備完了後) 水系名:多摩川 河川名:多摩川 流量規模:1/200 (単位:百万円)

氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
L1	342,797	422,338	38,812	23,236	56	28	827,267	0	0	0	613,841	37,231	59,270	32,979	92,250	10,962	26,312	166,755	1,607,863	
L2	99,641	100,062	10,239	4,274	88	46	214,349	0	5	5	159,097	1,354	8,076	4,415	12,491	1,858	6,234	21,937	395,388	
L3	751	432	169	107	0	0	1,459	0	0	0	1,082	20	28	16	44	21	27	112	2,653	
L4	10,245	5,479	1,559	453	4	2	17,742	1	3	4	13,253	608	1,123	585	1,707	119	341	2,776	33,774	
L5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
L7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R1	398,841	633,427	60,442	27,931	99	53	1,120,792	0	2	2	831,636	65,086	76,419	44,746	121,165	12,038	39,462	237,751	2,190,181	
R2	63,676	78,288	5,771	3,328	31	18	151,113	0	10	10	112,238	2,579	12,682	7,071	19,753	1,413	4,877	28,622	291,983	
R3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R4	2,741	1,166	169	86	0	0	4,161	0	0	0	3,088	94	391	191	581	33	73	781	8,030	
R5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R6	2,345	1,887	614	382	0	0	5,227	0	0	0	3,879	68	117	70	188	64	118	438	9,544	
R7	409	54	123	57	0	0	642	0	0	0	477	24	13	6	19	3	3	50	1,169	
R8	1,435	969	41	13	2	1	2,462	0	0	0	1,827	5	74	37	110	10	60	186	4,476	
合計	922,882	1,244,101	117,938	59,867	279	148	2,345,215	1	20	21	1,740,417	107,072	158,193	90,116	248,309	26,520	77,507	459,409	4,545,061	

様式-3

被害額(整備完了後)

水系名:多摩川

河川名:浅川

流量規模:1/7

(単位:百万円)

氾濫 ブロック	一般資産被害額						農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物			小計	清掃労働 対価	代替 活動等						小計
			償却	在庫	賠償	在庫														
AL1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AL2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AL3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AR1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AR2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AR3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
合計	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		

様式-3

被害額(整備完了後)

水系名:多摩川

河川名:浅川

流量規模:1/10

(単位:百万円)

氾濫 ブロック	一般資産被害額							農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物	小計			清掃労働 対価	代替 活動等	小計					
			償却	在庫	賠償	在庫														
AL1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AL2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AL3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AR1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AR2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AR3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
合計	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		

氾濫 ブロック	一般資産被害額						農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物			小計	清掃労働 対価	代替 活動等						小計
			償却	在庫	賠償	在庫														
AL1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AL2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AL3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AR1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AR2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
AR3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
合計	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		

様式-3

被害額(整備完了後)

水系名:多摩川

河川名:浅川

流量規模:1/70

(単位:百万円)

氾濫 ブロック	一般資産被害額						農作物被害額			公共土木施 設等被害額	営業停止 損失	家庭における応急対策費用			事業所に おける応急 対策費用	その他 の間接 被害	小計	合計	備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物			小計	清掃労働 対価	代替 活動等						小計
			償却	在庫	賠償	在庫														
AL1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
AL2	304	163	17	5	0	0	488	0	2	2	391	0	20	11	31	2	10	44	924	
AL3	3,197	2,293	247	144	0	0	5,882	0	0	0	4,364	57	364	198	562	51	143	813	11,059	
AR1	29,346	24,548	4,557	1,574	7	4	60,035	2	0	2	44,668	2,938	2,672	1,533	4,206	488	1,529	9,160	113,866	
AR2	2,357	2,049	132	62	2	1	4,601	0	0	0	3,414	0	170	105	275	24	128	427	8,442	
AR3	157	20	13	8	0	0	199	0	0	0	147	6	15	7	22	3	1	32	379	
合計	35,360	29,073	4,965	1,793	9	5	71,206	2	2	4	52,985	3,000	3,241	1,854	5,096	568	1,811	10,476	134,670	

様式-3

被害額(整備完了後)

水系名:多摩川

河川名:浅川

流量規模:1/100

(単位:百万円)

氾濫 ブロック	一般資産被害額						農作物被害額			公共土木施設等被害額	営業停止 損失	家庭における応急対策費用			事業所における応急 対策費用	その他の間接 被害	小計	合計	備考	
	家屋	家庭用品	事業所資産		農漁家資産		小計	水稻	畑作物			小計	清掃労働 対価	代替 活動等						小計
			償却	在庫	賠償	在庫														
AL1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
AL2	467	236	24	8	0	0	734	0	3	3	586	0	38	20	57	3	15	75	1,399	
AL3	4,560	3,636	374	219	0	0	8,789	0	0	0	6,521	85	744	399	1,144	87	227	1,542	16,852	
AR1	35,098	30,987	5,432	1,893	10	5	73,425	2	0	2	54,605	3,389	3,156	1,812	4,968	597	1,930	10,883	138,915	
AR2	3,537	3,370	207	98	4	2	7,219	0	0	0	5,356	0	263	152	416	46	210	672	13,247	
AR3	367	97	69	17	0	0	551	0	0	0	409	27	93	44	136	11	6	180	1,139	
合計	44,029	38,326	6,106	2,235	14	8	90,717	2	3	5	67,477	3,500	4,294	2,427	6,721	744	2,388	13,352	171,551	

様式－４ 年平均被害軽減期待額

水系名：多摩川

河川名：多摩川

全体事業

(単位：百万円)

流量規模	超過確率	被害額			区間平均被害額④	区間確率⑤	年平均被害額④×⑤	年平均被害額の累計 ＝年平均被害軽減期待額	備考
		事業を実施しない場合①	事業を実施した場合②	軽減額③＝①－②					
1/7	0.139	0	0	0	3,082	0.0389	120	120	
1/10	0.100	6,165	0	6,165	295,275	0.0667	19,685	19,805	
1/30	0.033	584,385	0	584,385	1,624,424	0.0190	30,941	50,746	
1/70	0.014	2,664,463	0	2,664,463	2,152,559	0.0043	9,225	59,972	
1/100	0.010	3,548,772	1,908,117	1,640,655	1,403,750	0.0050	7,019	66,990	
1/200	0.005	5,711,907	4,545,061	1,166,845					

様式－４ 年平均被害軽減期待額

水系名：多摩川

河川名：多摩川

当面7年間の整備後

(単位：百万円)

流量規模	超過確率	被害額			区間平均被害額④	区間確率⑤	年平均被害額④×⑤	年平均被害額の累計 ＝年平均被害軽減期待額	備考
		事業を実施しない場合①	事業を実施した場合②	軽減額③＝①－②					
1/7	0.139	0	0	0	0	0.0389	0	0	
1/10	0.100	6,165	6,165	0	102,128	0.0667	6,809	6,809	
1/30	0.033	584,385	380,128	204,257	286,382	0.0190	5,455	12,263	
1/70	0.014	2,664,463	2,295,956	368,507	346,713	0.0043	1,486	13,749	
1/100	0.010	3,548,772	3,223,853	324,919	296,448	0.0050	1,482	15,232	
1/200	0.005	5,711,907	5,443,929	267,978					

様式－４ 年平均被害軽減期待額

水系名：多摩川

河川名：浅川

全体事業

(単位：百万円)

流量規模	超過確率	被害額			区間平均被害額④	区間確率⑤	年平均被害額④×⑤	年平均被害額の累計 ＝年平均被害軽減期待額	備考
		事業を実施しない場合①	事業を実施した場合②	軽減額③＝①－②					
1/3	0.278	0	0	0	22,533	0.1349	3,040	3,040	
1/7	0.143	45,066	0	45,066	70,469	0.0429	3,020	6,060	
1/10	0.100	95,872	0	95,872	140,116	0.0667	9,341	15,401	
1/30	0.033	184,360	0	184,360	142,186	0.0190	2,708	18,110	
1/70	0.014	234,683	134,670	100,013	94,651	0.0043	406	18,515	
1/100	0.010	260,839	171,551	89,288					

様式－４ 年平均被害軽減期待額

水系名：多摩川

河川名：浅川

当面7年間の整備後

(単位：百万円)

流量規模	超過確率	被害額			区間平均被害額④	区間確率⑤	年平均被害額④×⑤	年平均被害額の累計 ＝年平均被害軽減期待額	備考
		事業を実施しない場合①	事業を実施した場合②	軽減額③＝①－②					
1/3	0.278	0	0	0	0	0.1349	0	0	
1/7	0.143	45,066	45,066	0	0	0.0429	0	0	
1/10	0.100	95,872	95,872	0	0	0.0667	0	0	
1/30	0.033	184,360	184,360	0	0	0.0190	0	0	
1/70	0.014	234,683	234,683	0	0	0.0043	0	0	
1/100	0.010	260,839	260,839	0					

費用対便益一覧表

評価事業	被害軽減効果 総便益	残存価値	総便益	総建設費	総維持管理費	総事業費	費用便益比	備考
	①	②	③(①+②)	④	⑤	⑥(④+⑤)	⑦(③／⑥)	
全体事業	1,139,991	3,732	1,143,723	79,197	634	79,831	14.3	社会的割引率 0.04
当面事業	297,217	1,991	299,208	23,214	185	23,400	12.8	社会的割引率 0.04
全体事業	2,305,204	17,647	2,322,851	103,170	1,257	104,427	22.2	社会的割引率 0.02
当面事業	466,967	6,023	472,990	24,553	289	24,843	19.0	社会的割引率 0.02
全体事業	3,470,603	38,812	3,509,415	119,266	1,876	121,142	29.0	社会的割引率 0.01
当面事業	606,191	10,560	616,751	25,277	375	25,652	24.0	社会的割引率 0.01

模式-5 費用対便益
全体事業(社会的割引率0.04)

水系名:多摩川

河川名:多摩川、浅川

単位:百万円

年次	年度	t	割引率	デフ レー ター	便益			費用						費用 便益比	純現在 価値	経済的 内部 収益率	
					便益①		残存価値	計	建設費③		維持管理費④		計③+④				
					便益	現在価値	②	①×②	費用	現在価値	費用	現在価値	費用	現在価値	B/C	B-C	EIRR
基準	R08	0	1.000	1.000													
施設整備期間 (30年)	R08	0	1.000	1.000	0	0		0	3,894	3,894	0.0	0.0	3,894	3,894			
	R09	1	0.962	1.000	2,176	2,092		2,092	3,894	3,744	1.6	1.5	3,895	3,745			
	R10	2	0.925	1.000	4,352	4,024		4,024	3,497	3,233	3.1	2.9	3,500	3,236			
	R11	3	0.889	1.000	6,528	5,803		5,803	3,497	3,109	4.7	4.1	3,502	3,113			
	R12	4	0.855	1.000	8,704	7,440		7,440	3,497	2,989	6.2	5.3	3,503	2,995			
	R13	5	0.822	1.000	10,880	8,942		8,942	3,497	2,874	7.8	6.4	3,505	2,881			
	R14	6	0.790	1.000	13,056	10,318		10,318	4,266	3,371	9.3	7.3	4,275	3,379			
	R15	7	0.760	1.000	15,232	11,575		11,575	4,071	3,094	10.9	8.2	4,082	3,102			
	R16	8	0.731	1.000	18,287	13,362		13,362	4,071	2,975	12.4	9.1	4,084	2,984			
	R17	9	0.703	1.000	21,342	14,995		14,995	4,071	2,861	14.0	9.8	4,085	2,870			
	R18	10	0.676	1.000	24,398	16,482		16,482	4,071	2,750	15.5	10.5	4,087	2,761			
	R19	11	0.650	1.000	27,453	17,833		17,833	4,071	2,645	17.1	11.1	4,088	2,656			
	R20	12	0.625	1.000	30,509	19,056		19,056	4,071	2,543	18.6	11.6	4,090	2,555			
	R21	13	0.601	1.000	33,564	20,158		20,158	5,293	3,179	20.2	12.1	5,313	3,191			
	R22	14	0.577	1.000	36,619	21,147		21,147	5,293	3,056	21.7	12.5	5,314	3,069			
	R23	15	0.555	1.000	39,675	22,030		22,030	5,293	2,939	23.3	12.9	5,316	2,952			
	R24	16	0.534	1.000	42,730	22,814		22,814	4,071	2,174	24.8	13.2	4,096	2,187			
	R25	17	0.513	1.000	45,785	23,505		23,505	4,071	2,090	26.4	13.5	4,098	2,104			
	R26	18	0.494	1.000	48,841	24,109		24,109	4,071	2,010	27.9	13.8	4,099	2,024			
	R27	19	0.475	1.000	51,896	24,632		24,632	4,071	1,932	29.5	14.0	4,101	1,946			
	R28	20	0.456	1.000	54,952	25,079		25,079	5,646	2,577	31.0	14.1	5,677	2,591			
	R29	21	0.439	1.000	58,007	25,455		25,455	5,646	2,478	32.6	14.3	5,678	2,492			
	R30	22	0.422	1.000	61,062	25,766		25,766	5,646	2,382	34.1	14.4	5,680	2,397			
	R31	23	0.406	1.000	64,118	26,014		26,014	5,646	2,291	35.7	14.5	5,682	2,305			
	R32	24	0.390	1.000	67,173	26,206		26,206	5,646	2,203	37.2	14.5	5,683	2,217			
	R33	25	0.375	1.000	70,229	26,344		26,344	5,646	2,118	38.8	14.5	5,685	2,132			
	R34	26	0.361	1.000	73,284	26,433		26,433	5,646	2,036	40.3	14.5	5,686	2,051			
	R35	27	0.347	1.000	76,339	26,476		26,476	5,646	1,958	41.9	14.5	5,688	1,973			
	R36	28	0.333	1.000	79,395	26,476		26,476	5,646	1,883	43.4	14.5	5,689	1,897			
	R37	29	0.321	1.000	82,450	26,438		26,438	5,646	1,810	45.0	14.4	5,691	1,825			
施設完成後の 評価期間 (50年)	R38	30	0.308		85,506	26,363		26,363			45.0	13.9	45.0	13.9			
	R39	31	0.296		85,506	25,349		25,349			45.0	13.3	45.0	13.3			
	R40	32	0.285		85,506	24,374		24,374			45.0	12.8	45.0	12.8			
	R41	33	0.274		85,506	23,437		23,437			45.0	12.3	45.0	12.3			
	R42	34	0.264		85,506	22,535		22,535			45.0	11.8	45.0	11.8			
	R43	35	0.253		85,506	21,668		21,668			45.0	11.4	45.0	11.4			
	R44	36	0.244		85,506	20,835		20,835			45.0	11.0	45.0	11.0			
	R45	37	0.234		85,506	20,034		20,034			45.0	10.5	45.0	10.5			
	R46	38	0.225		85,506	19,263		19,263			45.0	10.1	45.0	10.1			
	R47	39	0.217		85,506	18,522		18,522			45.0	9.7	45.0	9.7			
	R48	40	0.208		85,506	17,810		17,810			45.0	9.4	45.0	9.4			
	R49	41	0.200		85,506	17,125		17,125			45.0	9.0	45.0	9.0			
	R50	42	0.193		85,506	16,466		16,466			45.0	8.7	45.0	8.7			
	R51	43	0.185		85,506	15,833		15,833			45.0	8.3	45.0	8.3			
	R52	44	0.178		85,506	15,224		15,224			45.0	8.0	45.0	8.0			
	R53	45	0.171		85,506	14,638		14,638			45.0	7.7	45.0	7.7			
	R54	46	0.165		85,506	14,075		14,075			45.0	7.4	45.0	7.4			
	R55	47	0.158		85,506	13,534		13,534			45.0	7.1	45.0	7.1			
	R56	48	0.152		85,506	13,013		13,013			45.0	6.8	45.0	6.8			
	R57	49	0.146		85,506	12,513		12,513			45.0	6.6	45.0	6.6			
	R58	50	0.141		85,506	12,032		12,032			45.0	6.3	45.0	6.3			
	R59	51	0.135		85,506	11,569		11,569			45.0	6.1	45.0	6.1			
	R60	52	0.130		85,506	11,124		11,124			45.0	5.8	45.0	5.8			
	R61	53	0.125		85,506	10,696		10,696			45.0	5.6	45.0	5.6			
	R62	54	0.120		85,506	10,285		10,285			45.0	5.4	45.0	5.4			
	R63	55	0.116		85,506	9,889		9,889			45.0	5.2	45.0	5.2			
	R64	56	0.111		85,506	9,509		9,509			45.0	5.0	45.0	5.0			
	R65	57	0.107		85,506	9,143		9,143			45.0	4.8	45.0	4.8			
	R66	58	0.103		85,506	8,791		8,791			45.0	4.6	45.0	4.6			
	R67	59	0.099		85,506	8,453		8,453			45.0	4.4	45.0	4.4			
	R68	60	0.095		85,506	8,128		8,128			45.0	4.3	45.0	4.3			
	R69	61	0.091		85,506	7,816		7,816			45.0	4.1	45.0	4.1			
	R70	62	0.088		85,506	7,515		7,515			45.0	4.0	45.0	4.0			
	R71	63	0.085		85,506	7,226		7,226			45.0	3.8	45.0	3.8			
	R72	64	0.081		85,506	6,948		6,948			45.0	3.7	45.0	3.7			
	R73	65	0.078		85,506	6,681		6,681			45.0	3.5	45.0	3.5			
	R74	66	0.075		85,506	6,424		6,424			45.0	3.4	45.0	3.4			
	R75	67	0.072		85,506	6,177		6,177			45.0	3.2	45.0	3.2			
	R76	68	0.069		85,506	5,939		5,939			45.0	3.1	45.0	3.1			
	R77	69	0.067		85,506	5,711		5,711			45.0	3.0	45.0	3.0			
	R78	70	0.064		85,506	5,491		5,491			45.0	2.9	45.0	2.9			
	R79	71	0.062		85,506	5,280		5,280			45.0	2.8	45.0	2.8			
	R80	72	0.059		85,506	5,077		5,077			45.0	2.7	45.0	2.7			
	R81	73	0.057		85,506	4,882		4,882			45.0	2.6	45.0	2.6			
	R82	74	0.055		85,506	4,694		4,694			45.0	2.5	45.0	2.5			
	R83	75	0.053		85,506	4,513		4,513			45.0	2.4	45.0	2.4			
	R84	76	0.051		85,506	4,340		4,340			45.0	2.3	45.0	2.3			
	R85	77	0.049		85,506	4,173		4,173			45.0	2.2	45.0	2.2			
	R86	78	0.047		85,506	4,012		4,012			45.0	2.1	45.0	2.1			
	R87	79	0.045		85,506	3,858		3,858			45.0	2.0	45.0	2.0			
合計					5,444,311	1,139,991	3,732	1,143,723=B	139,092	79,197	2,922	634	142,014	79,831=C	14.3	1,063,891	58.5%

様式－5 費用対便益

水系名:多摩川

河川名:多摩川、浅川

当面7年間の整備後(社会的割引率0.04)

単位:百万円

④面7年間の整備後(社会的割引率0.04)																	単位:百万円		
年次	年度	t	割引率	デフ レー ター	便益				費用						費用 便益比	純現在 価値	経済的 内部 収益率		
					便益①		残存価値	計	建設費③		維持管理費④		計③+④						
					便益	現在価値			②	①+②	費用	現在価値	費用	現在価値				費用	現在価値
基準	R08	0	1.000	1.000															
施設 整備 期間 (7年)	R08	0	1.000	1.000	0	0		0	3,894	3,894	0.0	0.0	3,894	3,894					
	R09	1	0.962	1.000	2,176	2,092		2,092	3,894	3,744	1.6	1.5	3,895	3,745					
	R10	2	0.925	1.000	4,352	4,024		4,024	3,497	3,233	3.1	2.9	3,500	3,236					
	R11	3	0.889	1.000	6,528	5,803		5,803	3,497	3,109	4.7	4.1	3,502	3,113					
	R12	4	0.855	1.000	8,704	7,440		7,440	3,497	2,989	6.2	5.3	3,503	2,995					
	R13	5	0.822	1.000	10,880	8,942		8,942	3,497	2,874	7.8	6.4	3,505	2,881					
	R14	6	0.790	1.000	13,056	10,318		10,318	4,266	3,371	9.3	7.3	4,275	3,379					
施設 完成 後の 評価 期間 (50年)	R15	7	0.760		15,232	11,575		11,575			9.3	7.1	9.3	7.1					
	R16	8	0.731		15,232	11,130		11,130			9.3	6.8	9.3	6.8					
	R17	9	0.703		15,232	10,702		10,702			9.3	6.5	9.3	6.5					
	R18	10	0.676		15,232	10,290		10,290			9.3	6.3	9.3	6.3					
	R19	11	0.650		15,232	9,894		9,894			9.3	6.0	9.3	6.0					
	R20	12	0.625		15,232	9,514		9,514			9.3	5.8	9.3	5.8					
	R21	13	0.601		15,232	9,148		9,148			9.3	5.6	9.3	5.6					
	R22	14	0.577		15,232	8,796		8,796			9.3	5.4	9.3	5.4					
	R23	15	0.555		15,232	8,458		8,458			9.3	5.2	9.3	5.2					
	R24	16	0.534		15,232	8,132		8,132			9.3	5.0	9.3	5.0					
	R25	17	0.513		15,232	7,819		7,819			9.3	4.8	9.3	4.8					
	R26	18	0.494		15,232	7,519		7,519			9.3	4.6	9.3	4.6					
	R27	19	0.475		15,232	7,230		7,230			9.3	4.4	9.3	4.4					
	R28	20	0.456		15,232	6,952		6,952			9.3	4.2	9.3	4.2					
	R29	21	0.439		15,232	6,684		6,684			9.3	4.1	9.3	4.1					
	R30	22	0.422		15,232	6,427		6,427			9.3	3.9	9.3	3.9					
	R31	23	0.406		15,232	6,180		6,180			9.3	3.8	9.3	3.8					
	R32	24	0.390		15,232	5,942		5,942			9.3	3.6	9.3	3.6					
	R33	25	0.375		15,232	5,714		5,714			9.3	3.5	9.3	3.5					
	R34	26	0.361		15,232	5,494		5,494			9.3	3.4	9.3	3.4					
	R35	27	0.347		15,232	5,283		5,283			9.3	3.2	9.3	3.2					
	R36	28	0.333		15,232	5,079		5,079			9.3	3.1	9.3	3.1					
	R37	29	0.321		15,232	4,884		4,884			9.3	3.0	9.3	3.0					
	R38	30	0.308		15,232	4,696		4,696			9.3	2.9	9.3	2.9					
	R39	31	0.296		15,232	4,516		4,516			9.3	2.8	9.3	2.8					
	R40	32	0.285		15,232	4,342		4,342			9.3	2.7	9.3	2.7					
	R41	33	0.274		15,232	4,175		4,175			9.3	2.5	9.3	2.5					
	R42	34	0.264		15,232	4,014		4,014			9.3	2.5	9.3	2.5					
	R43	35	0.253		15,232	3,860		3,860			9.3	2.4	9.3	2.4					
	R44	36	0.244		15,232	3,711		3,711			9.3	2.3	9.3	2.3					
	R45	37	0.234		15,232	3,569		3,569			9.3	2.2	9.3	2.2					
	R46	38	0.225		15,232	3,431		3,431			9.3	2.1	9.3	2.1					
	R47	39	0.217		15,232	3,299		3,299			9.3	2.0	9.3	2.0					
	R48	40	0.208		15,232	3,173		3,173			9.3	1.9	9.3	1.9					
	R49	41	0.200		15,232	3,051		3,051			9.3	1.9	9.3	1.9					
	R50	42	0.193		15,232	2,933		2,933			9.3	1.8	9.3	1.8					
R51	43	0.185		15,232	2,820		2,820			9.3	1.7	9.3	1.7						
R52	44	0.178		15,232	2,712		2,712			9.3	1.7	9.3	1.7						
R53	45	0.171		15,232	2,608		2,608			9.3	1.6	9.3	1.6						
R54	46	0.165		15,232	2,507		2,507			9.3	1.5	9.3	1.5						
R55	47	0.158		15,232	2,411		2,411			9.3	1.5	9.3	1.5						
R56	48	0.152		15,232	2,318		2,318			9.3	1.4	9.3	1.4						
R57	49	0.146		15,232	2,229		2,229			9.3	1.4	9.3	1.4						
R58	50	0.141		15,232	2,143		2,143			9.3	1.3	9.3	1.3						
R59	51	0.135		15,232	2,061		2,061			9.3	1.3	9.3	1.3						
R60	52	0.130		15,232	1,982		1,982			9.3	1.2	9.3	1.2						
R61	53	0.125		15,232	1,905		1,905			9.3	1.2	9.3	1.2						
R62	54	0.120		15,232	1,832		1,832			9.3	1.1	9.3	1.1						
R63	55	0.116		15,232	1,762		1,762			9.3	1.1	9.3	1.1						
R64	56	0.111		15,232	1,694		1,694			9.3	1.0	9.3	1.0						
合計					807,275	297,217	1,991	299,208-B	26,041	23,214	498	185	26,539	23,400-C	12.8	275,808	57.8%		

模式-5 費用対便益
全体事業(社会的割引率0.02)

水系名:多摩川

河川名:多摩川、浅川

単位:百万円

年次	年度	t	割引率	デフ レー ター	便益			費用						費用 便益比	純現在 価値	経済的 内部 収益率	
					便益①		残存価値 ②	計 ①+②	建設費③		維持管理費④		計③+④				
					便益	現在価値			費用	現在価値	費用	現在価値	費用				現在価値
基準	R08	0	1.000	1.000													
施設整備期間 （30年）	R08	0	1.000	1.000	0	0		0	3,894	3,894	0.0	0.0	3,894	3,894			
	R09	1	0.980	1.000	2,176	2,133		2,133	3,894	3,817	1.6	1.5	3,895	3,819			
	R10	2	0.961	1.000	4,352	4,183		4,183	3,497	3,361	3.1	3.0	3,500	3,364			
	R11	3	0.942	1.000	6,528	6,151		6,151	3,497	3,295	4.7	4.4	3,502	3,300			
	R12	4	0.924	1.000	8,704	8,041		8,041	3,497	3,231	6.2	5.7	3,503	3,236			
	R13	5	0.906	1.000	10,880	9,854		9,854	3,497	3,167	7.8	7.0	3,505	3,174			
	R14	6	0.888	1.000	13,056	11,593		11,593	4,266	3,788	9.3	8.3	4,275	3,796			
	R15	7	0.871	1.000	15,232	13,260		13,260	4,071	3,544	10.9	9.4	4,082	3,554			
	R16	8	0.853	1.000	18,287	15,608		15,608	4,071	3,475	12.4	10.6	4,084	3,485			
	R17	9	0.837	1.000	21,342	17,858		17,858	4,071	3,407	14.0	11.7	4,085	3,418			
	R18	10	0.820	1.000	24,398	20,015		20,015	4,071	3,340	15.5	12.7	4,087	3,353			
	R19	11	0.804	1.000	27,453	22,080		22,080	4,071	3,274	17.1	13.7	4,088	3,288			
	R20	12	0.788	1.000	30,509	24,056		24,056	4,071	3,210	18.6	14.7	4,090	3,225			
	R21	13	0.773	1.000	33,564	25,946		25,946	5,293	4,091	20.2	15.6	5,313	4,107			
	R22	14	0.758	1.000	36,619	27,753		27,753	5,293	4,011	21.7	16.4	5,314	4,028			
	R23	15	0.743	1.000	39,675	29,479		29,479	5,293	3,932	23.3	17.3	5,316	3,950			
	R24	16	0.728	1.000	42,730	31,127		31,127	4,071	2,966	24.8	18.1	4,096	2,984			
	R25	17	0.714	1.000	45,785	32,698		32,698	4,071	2,908	26.4	18.8	4,098	2,926			
	R26	18	0.700	1.000	48,841	34,196		34,196	4,071	2,851	27.9	19.5	4,099	2,870			
	R27	19	0.686	1.000	51,896	35,623		35,623	4,071	2,795	29.5	20.2	4,101	2,815			
	R28	20	0.673	1.000	54,952	36,981		36,981	5,646	3,800	31.0	20.9	5,677	3,820			
	R29	21	0.660	1.000	58,007	38,272		38,272	5,646	3,725	32.6	21.5	5,678	3,747			
	R30	22	0.647	1.000	61,062	39,498		39,498	5,646	3,652	34.1	22.1	5,680	3,674			
	R31	23	0.634	1.000	64,118	40,661		40,661	5,646	3,580	35.7	22.6	5,682	3,603			
	R32	24	0.622	1.000	67,173	41,763		41,763	5,646	3,510	37.2	23.1	5,683	3,533			
	R33	25	0.610	1.000	70,229	42,806		42,806	5,646	3,441	38.8	23.6	5,685	3,465			
	R34	26	0.598	1.000	73,284	43,793		43,793	5,646	3,374	40.3	24.1	5,686	3,398			
	R35	27	0.586	1.000	76,339	44,724		44,724	5,646	3,308	41.9	24.5	5,688	3,332			
	R36	28	0.574	1.000	79,395	45,602		45,602	5,646	3,243	43.4	24.9	5,689	3,268			
	R37	29	0.563	1.000	82,450	46,429		46,429	5,646	3,179	45.0	25.3	5,691	3,205			
施設完成後の 評価期間 （50年）	R38	30	0.552		85,506	47,205		47,205			45.0	24.8	45.0	24.8			
	R39	31	0.541		85,506	46,280		46,280			45.0	24.3	45.0	24.3			
	R40	32	0.531		85,506	45,372		45,372			45.0	23.9	45.0	23.9			
	R41	33	0.520		85,506	44,482		44,482			45.0	23.4	45.0	23.4			
	R42	34	0.510		85,506	43,610		43,610			45.0	22.9	45.0	22.9			
	R43	35	0.500		85,506	42,755		42,755			45.0	22.5	45.0	22.5			
	R44	36	0.490		85,506	41,917		41,917			45.0	22.0	45.0	22.0			
	R45	37	0.481		85,506	41,095		41,095			45.0	21.6	45.0	21.6			
	R46	38	0.471		85,506	40,289		40,289			45.0	21.2	45.0	21.2			
	R47	39	0.462		85,506	39,499		39,499			45.0	20.8	45.0	20.8			
	R48	40	0.453		85,506	38,725		38,725			45.0	20.4	45.0	20.4			
	R49	41	0.444		85,506	37,965		37,965			45.0	20.0	45.0	20.0			
	R50	42	0.435		85,506	37,221		37,221			45.0	19.6	45.0	19.6			
	R51	43	0.427		85,506	36,491		36,491			45.0	19.2	45.0	19.2			
	R52	44	0.418		85,506	35,776		35,776			45.0	18.8	45.0	18.8			
	R53	45	0.410		85,506	35,074		35,074			45.0	18.4	45.0	18.4			
	R54	46	0.402		85,506	34,386		34,386			45.0	18.1	45.0	18.1			
	R55	47	0.394		85,506	33,712		33,712			45.0	17.7	45.0	17.7			
	R56	48	0.387		85,506	33,051		33,051			45.0	17.4	45.0	17.4			
	R57	49	0.379		85,506	32,403		32,403			45.0	17.0	45.0	17.0			
	R58	50	0.372		85,506	31,768		31,768			45.0	16.7	45.0	16.7			
	R59	51	0.364		85,506	31,145		31,145			45.0	16.4	45.0	16.4			
	R60	52	0.357		85,506	30,534		30,534			45.0	16.1	45.0	16.1			
	R61	53	0.350		85,506	29,935		29,935			45.0	15.7	45.0	15.7			
	R62	54	0.343		85,506	29,348		29,348			45.0	15.4	45.0	15.4			
	R63	55	0.337		85,506	28,773		28,773			45.0	15.1	45.0	15.1			
	R64	56	0.330		85,506	28,209		28,209			45.0	14.8	45.0	14.8			
	R65	57	0.323		85,506	27,656		27,656			45.0	14.5	45.0	14.5			
	R66	58	0.317		85,506	27,113		27,113			45.0	14.3	45.0	14.3			
	R67	59	0.311		85,506	26,582		26,582			45.0	14.0	45.0	14.0			
	R68	60	0.305		85,506	26,061		26,061			45.0	13.7	45.0	13.7			
	R69	61	0.299		85,506	25,550		25,550			45.0	13.4	45.0	13.4			
	R70	62	0.293		85,506	25,049		25,049			45.0	13.2	45.0	13.2			
	R71	63	0.287		85,506	24,557		24,557			45.0	12.9	45.0	12.9			
	R72	64	0.282		85,506	24,076		24,076			45.0	12.7	45.0	12.7			
	R73	65	0.276		85,506	23,604		23,604			45.0	12.4	45.0	12.4			
	R74	66	0.271		85,506	23,141		23,141			45.0	12.2	45.0	12.2			
	R75	67	0.265		85,506	22,687		22,687			45.0	11.9	45.0	11.9			
	R76	68	0.260		85,506	22,242		22,242			45.0	11.7	45.0	11.7			
	R77	69	0.255		85,506	21,806		21,806			45.0	11.5	45.0	11.5			
	R78	70	0.250		85,506	21,379		21,379			45.0	11.2	45.0	11.2			
	R79	71	0.245		85,506	20,960		20,960			45.0	11.0	45.0	11.0			
	R80	72	0.240		85,506	20,549		20,549			45.0	10.8	45.0	10.8			
	R81	73	0.236		85,506	20,146		20,146			45.0	10.6	45.0	10.6			
	R82	74	0.231		85,506	19,751		19,751			45.0	10.4	45.0	10.4			
	R83	75	0.226		85,506	19,363		19,363			45.0	10.2	45.0	10.2			
	R84	76	0.222		85,506	18,984		18,984			45.0	10.0	45.0	10.0			
	R85	77	0.218		85,506	18,611		18,611			45.0	9.8	45.0	9.8			
	R86	78	0.213		85,506	18,247		18,247			45.0	9.6	45.0	9.6			
	R87	79	0.209		85,506	17,889		17,889			45.0	9.4	45.0	9.4			
合計					5,444,311	2,305,204	17,647	2,322,851=B	139,092	103,170	2,922	1,257	142,014	104,427=C	22.2	2,218,424	58.5%

様式-5 費用対便益

水系名:多摩川

河川名:多摩川、浅川

当面7年間の整備後(社会的割引率0.02)

単位:百万円

当国7年間の整備後(社会的割引率0.02)																		単位:百万円		
年次	年度	t	割引率	デフ レー ター	便益				費用						費用 便益比	純現在 価値	経済的 内部 収益率			
					便益①		残存価値	計	建設費③		維持管理費④		計③+④							
					便益	現在価値			②	①+②	費用	現在価値	費用	現在価値				費用	現在価値	
基準	R08	0	1.000	1.000																
施設 整備 期間 (7年)	R08	0	1.000	1.000	0	0		0	3,894	3,894	0.0	0.0	3,894	3,894						
	R09	1	0.980	1.000	2,176	2,133		2,133	3,894	3,817	1.6	1.5	3,895	3,819						
	R10	2	0.961	1.000	4,352	4,183		4,183	3,497	3,361	3.1	3.0	3,500	3,364						
	R11	3	0.942	1.000	6,528	6,151		6,151	3,497	3,295	4.7	4.4	3,502	3,300						
	R12	4	0.924	1.000	8,704	8,041		8,041	3,497	3,231	6.2	5.7	3,503	3,236						
	R13	5	0.906	1.000	10,880	9,854		9,854	3,497	3,167	7.8	7.0	3,505	3,174						
	R14	6	0.888	1.000	13,056	11,593		11,593	4,266	3,788	9.3	8.3	4,275	3,796						
施設 完成 後の 評価 期間 (50年)	R15	7	0.871		15,232	13,260		13,260			9.3	8.1	9.3	8.1						
	R16	8	0.853		15,232	13,000		13,000			9.3	7.9	9.3	7.9						
	R17	9	0.837		15,232	12,745		12,745			9.3	7.8	9.3	7.8						
	R18	10	0.820		15,232	12,495		12,495			9.3	7.6	9.3	7.6						
	R19	11	0.804		15,232	12,250		12,250			9.3	7.5	9.3	7.5						
	R20	12	0.788		15,232	12,010		12,010			9.3	7.3	9.3	7.3						
	R21	13	0.773		15,232	11,775		11,775			9.3	7.2	9.3	7.2						
	R22	14	0.758		15,232	11,544		11,544			9.3	7.0	9.3	7.0						
	R23	15	0.743		15,232	11,317		11,317			9.3	6.9	9.3	6.9						
	R24	16	0.728		15,232	11,095		11,095			9.3	6.8	9.3	6.8						
	R25	17	0.714		15,232	10,878		10,878			9.3	6.6	9.3	6.6						
	R26	18	0.700		15,232	10,665		10,665			9.3	6.5	9.3	6.5						
	R27	19	0.686		15,232	10,455		10,455			9.3	6.4	9.3	6.4						
	R28	20	0.673		15,232	10,250		10,250			9.3	6.3	9.3	6.3						
	R29	21	0.660		15,232	10,049		10,049			9.3	6.1	9.3	6.1						
	R30	22	0.647		15,232	9,852		9,852			9.3	6.0	9.3	6.0						
	R31	23	0.634		15,232	9,659		9,659			9.3	5.9	9.3	5.9						
	R32	24	0.622		15,232	9,470		9,470			9.3	5.8	9.3	5.8						
	R33	25	0.610		15,232	9,284		9,284			9.3	5.7	9.3	5.7						
	R34	26	0.598		15,232	9,102		9,102			9.3	5.6	9.3	5.6						
	R35	27	0.586		15,232	8,924		8,924			9.3	5.4	9.3	5.4						
	R36	28	0.574		15,232	8,749		8,749			9.3	5.3	9.3	5.3						
	R37	29	0.563		15,232	8,577		8,577			9.3	5.2	9.3	5.2						
	R38	30	0.552		15,232	8,409		8,409			9.3	5.1	9.3	5.1						
	R39	31	0.541		15,232	8,244		8,244			9.3	5.0	9.3	5.0						
	R40	32	0.531		15,232	8,082		8,082			9.3	4.9	9.3	4.9						
	R41	33	0.520		15,232	7,924		7,924			9.3	4.8	9.3	4.8						
	R42	34	0.510		15,232	7,769		7,769			9.3	4.7	9.3	4.7						
	R43	35	0.500		15,232	7,616		7,616			9.3	4.7	9.3	4.7						
	R44	36	0.490		15,232	7,467		7,467			9.3	4.6	9.3	4.6						
	R45	37	0.481		15,232	7,320		7,320			9.3	4.5	9.3	4.5						
	R46	38	0.471		15,232	7,177		7,177			9.3	4.4	9.3	4.4						
	R47	39	0.462		15,232	7,036		7,036			9.3	4.3	9.3	4.3						
	R48	40	0.453		15,232	6,898		6,898			9.3	4.2	9.3	4.2						
R49	41	0.444		15,232	6,763		6,763			9.3	4.1	9.3	4.1							
R50	42	0.435		15,232	6,630		6,630			9.3	4.0	9.3	4.0							
R51	43	0.427		15,232	6,500		6,500			9.3	4.0	9.3	4.0							
R52	44	0.418		15,232	6,373		6,373			9.3	3.9	9.3	3.9							
R53	45	0.410		15,232	6,248		6,248			9.3	3.8	9.3	3.8							
R54	46	0.402		15,232	6,125		6,125			9.3	3.7	9.3	3.7							
R55	47	0.394		15,232	6,005		6,005			9.3	3.7	9.3	3.7							
R56	48	0.387		15,232	5,888		5,888			9.3	3.6	9.3	3.6							
R57	49	0.379		15,232	5,772		5,772			9.3	3.5	9.3	3.5							
R58	50	0.372		15,232	5,659		5,659			9.3	3.5	9.3	3.5							
R59	51	0.364		15,232	5,548		5,548			9.3	3.4	9.3	3.4							
R60	52	0.357		15,232	5,439		5,439			9.3	3.3	9.3	3.3							
R61	53	0.350		15,232	5,333		5,333			9.3	3.3	9.3	3.3							
R62	54	0.343		15,232	5,228		5,228			9.3	3.2	9.3	3.2							
R63	55	0.337		15,232	5,125		5,125			9.3	3.1	9.3	3.1							
R64	56	0.330		15,232	5,025		5,025			9.3	3.1	9.3	3.1							
合計					807,275	466,967	6,023	472,990=B	26,041	24,553	498	289	26,539	24,843=C	19.0	448,147	57.8%			

模式-5 費用対便益
全体事業(社会的割引率0.01)

水系名:多摩川

河川名:多摩川、浅川

単位:百万円

年次	年度	t	割引率	デフ レー ター	便益			費用						費用 便益比	純現在 価値	経済的 内部 収益率		
					便益①		残存価値	計	建設費③		維持管理費④		計③＋④					
					便益	現在価値			②	①×②	費用	現在価値	費用				現在価値	費用
基準	R08	0	1.000	1.000											B/C	B-C	EIRR	
施設整備期間（30年）	R08	0	1.000	1.000	0	0		0	3,894	3,894	0.0	0.0	3,894	3,894				
	R09	1	0.990	1.000	2,176	2,154		2,154	3,894	3,855	1.6	1.5	3,895	3,857				
	R10	2	0.980	1.000	4,352	4,266		4,266	3,497	3,428	3.1	3.0	3,500	3,431				
	R11	3	0.971	1.000	6,528	6,336		6,336	3,497	3,394	4.7	4.5	3,502	3,399				
	R12	4	0.961	1.000	8,704	8,364		8,364	3,497	3,361	6.2	6.0	3,503	3,366				
	R13	5	0.951	1.000	10,880	10,352		10,352	3,497	3,327	7.8	7.4	3,505	3,335				
	R14	6	0.942	1.000	13,056	12,299		12,299	4,266	4,019	9.3	8.8	4,275	4,027				
	R15	7	0.933	1.000	15,232	14,207		14,207	4,071	3,797	10.9	10.1	4,082	3,808				
	R16	8	0.923	1.000	18,287	16,888		16,888	4,071	3,760	12.4	11.5	4,084	3,771				
	R17	9	0.914	1.000	21,342	19,514		19,514	4,071	3,723	14.0	12.8	4,085	3,735				
	R18	10	0.905	1.000	24,398	22,087		22,087	4,071	3,686	15.5	14.0	4,087	3,700				
	R19	11	0.896	1.000	27,453	24,607		24,607	4,071	3,649	17.1	15.3	4,088	3,665				
	R20	12	0.887	1.000	30,509	27,075		27,075	4,071	3,613	18.6	16.5	4,090	3,630				
	R21	13	0.879	1.000	33,564	29,491		29,491	5,293	4,650	20.2	17.7	5,313	4,668				
	R22	14	0.870	1.000	36,619	31,857		31,857	5,293	4,604	21.7	18.9	5,314	4,623				
	R23	15	0.861	1.000	39,675	34,174		34,174	5,293	4,559	23.3	20.0	5,316	4,579				
	R24	16	0.853	1.000	42,730	36,441		36,441	4,071	3,472	24.8	21.1	4,096	3,493				
	R25	17	0.844	1.000	45,785	38,660		38,660	4,071	3,438	26.4	22.2	4,098	3,460				
	R26	18	0.836	1.000	48,841	40,832		40,832	4,071	3,404	27.9	23.3	4,099	3,427				
	R27	19	0.828	1.000	51,896	42,957		42,957	4,071	3,370	29.5	24.4	4,101	3,394				
	R28	20	0.820	1.000	54,952	45,035		45,035	5,646	4,627	31.0	25.4	5,677	4,652				
	R29	21	0.811	1.000	58,007	47,069		47,069	5,646	4,581	32.6	26.4	5,678	4,608				
	R30	22	0.803	1.000	61,062	49,057		49,057	5,646	4,536	34.1	27.4	5,680	4,563				
	R31	23	0.795	1.000	64,118	51,002		51,002	5,646	4,491	35.7	28.4	5,682	4,519				
	R32	24	0.788	1.000	67,173	52,903		52,903	5,646	4,447	37.2	29.3	5,683	4,476				
	R33	25	0.780	1.000	70,229	54,762		54,762	5,646	4,403	38.8	30.2	5,685	4,433				
	R34	26	0.772	1.000	73,284	56,579		56,579	5,646	4,359	40.3	31.1	5,686	4,390				
	R35	27	0.764	1.000	76,339	58,354		58,354	5,646	4,316	41.9	32.0	5,688	4,348				
	R36	28	0.757	1.000	79,395	60,089		60,089	5,646	4,273	43.4	32.8	5,689	4,306				
	R37	29	0.749	1.000	82,450	61,783		61,783	5,646	4,231	45.0	33.7	5,691	4,264				
	施設完成後の評価期間（50年）	R38	30	0.742		85,506	63,439		63,439			45.0	33.3	45.0	33.3			
		R39	31	0.735		85,506	62,810		62,810			45.0	33.0	45.0	33.0			
		R40	32	0.727		85,506	62,189		62,189			45.0	32.7	45.0	32.7			
		R41	33	0.720		85,506	61,573		61,573			45.0	32.4	45.0	32.4			
		R42	34	0.713		85,506	60,963		60,963			45.0	32.0	45.0	32.0			
		R43	35	0.706		85,506	60,360		60,360			45.0	31.7	45.0	31.7			
		R44	36	0.699		85,506	59,762		59,762			45.0	31.4	45.0	31.4			
R45		37	0.692		85,506	59,170		59,170			45.0	31.1	45.0	31.1				
R46		38	0.685		85,506	58,584		58,584			45.0	30.8	45.0	30.8				
R47		39	0.678		85,506	58,004		58,004			45.0	30.5	45.0	30.5				
R48		40	0.672		85,506	57,430		57,430			45.0	30.2	45.0	30.2				
R49		41	0.665		85,506	56,861		56,861			45.0	29.9	45.0	29.9				
R50		42	0.658		85,506	56,298		56,298			45.0	29.6	45.0	29.6				
R51		43	0.652		85,506	55,741		55,741			45.0	29.3	45.0	29.3				
R52		44	0.645		85,506	55,189		55,189			45.0	29.0	45.0	29.0				
R53		45	0.639		85,506	54,643		54,643			45.0	28.7	45.0	28.7				
R54		46	0.633		85,506	54,102		54,102			45.0	28.4	45.0	28.4				
R55		47	0.626		85,506	53,566		53,566			45.0	28.2	45.0	28.2				
R56		48	0.620		85,506	53,036		53,036			45.0	27.9	45.0	27.9				
R57		49	0.614		85,506	52,511		52,511			45.0	27.6	45.0	27.6				
R58		50	0.608		85,506	51,991		51,991			45.0	27.3	45.0	27.3				
R59		51	0.602		85,506	51,476		51,476			45.0	27.1	45.0	27.1				
R60		52	0.596		85,506	50,966		50,966			45.0	26.8	45.0	26.8				
R61		53	0.590		85,506	50,462		50,462			45.0	26.5	45.0	26.5				
R62		54	0.584		85,506	49,962		49,962			45.0	26.3	45.0	26.3				
R63		55	0.579		85,506	49,467		49,467			45.0	26.0	45.0	26.0				
R64		56	0.573		85,506	48,978		48,978			45.0	25.7	45.0	25.7				
R65		57	0.567		85,506	48,493		48,493			45.0	25.5	45.0	25.5				
R66		58	0.562		85,506	48,013		48,013			45.0	25.2	45.0	25.2				
R67		59	0.556		85,506	47,537		47,537			45.0	25.0	45.0	25.0				
R68		60	0.550		85,506	47,066		47,066			45.0	24.7	45.0	24.7				
R69		61	0.545		85,506	46,600		46,600			45.0	24.5	45.0	24.5				
R70		62	0.540		85,506	46,139		46,139			45.0	24.3	45.0	24.3				
R71		63	0.534		85,506	45,682		45,682			45.0	24.0	45.0	24.0				
R72		64	0.529		85,506	45,230		45,230			45.0	23.8	45.0	23.8				
R73		65	0.524		85,506	44,782		44,782			45.0	23.5	45.0	23.5				
R74		66	0.519		85,506	44,339		44,339			45.0	23.3	45.0	23.3				
R75	67	0.513		85,506	43,900		43,900			45.0	23.1	45.0	23.1					
R76	68	0.508		85,506	43,465		43,465			45.0	22.8	45.0	22.8					
R77	69	0.503		85,506	43,035		43,035			45.0	22.6	45.0	22.6					
R78	70	0.498		85,506	42,609		42,609			45.0	22.4	45.0	22.4					
R79	71	0.493		85,506	42,187		42,187			45.0	22.2	45.0	22.2					
R80	72	0.488		85,506	41,769		41,769			45.0	22.0	45.0	22.0					
R81	73	0.484		85,506	41,356		41,356			45.0	21.7	45.0	21.7					
R82	74	0.479		85,506	40,946		40,946			45.0	21.5	45.0	21.5					
R83	75	0.474		85,506	40,541		40,541			45.0	21.3	45.0	21.3					
R84	76	0.469		85,506	40,139		40,139			45.0	21.1	45.0	21.1					
R85	77	0.465		85,506	39,742		39,742			45.0	20.9	45.0	20.9					
R86	78	0.460		85,506	39,348		39,348			45.0	20.7	45.0	20.7					
R87	79	0.456		85,506	38,959		38,959			45.0	20.5	45.0	20.5					
合計					5,444,311	3,470,603	38,812	3,509,415=B	139,092	119,266	2,922	1,876	142,014	121,142=C	29.0	3,388,273	58.5%	

様式－5 費用対便益

水系名：多摩川

河川名：多摩川、浅川

当面7年間の整備後(社会的割引率0.01)

単位：百万円

当面7年間の整備後(社会的割引率0.01)																	単位:百万円	
年次	年度	t	割引率	デフ レー ター	便益				費用						費用 便益比	純現在 価値	経済的 内部 収益率	
					便益①		残存価値	計	建設費③		維持管理費④		計③+④					
					便益	現在価値			②	①+②	費用	現在価値	費用	現在価値				費用
基準	R08	0	1.000	1.000														
施設整備期間(7年)	R08	0	1.000	1.000	0	0		0	3,894	3,894	0.0	0.0	3,894	3,894				
	R09	1	0.990	1.000	2,176	2,154		2,154	3,894	3,855	1.6	1.5	3,895	3,857				
	R10	2	0.980	1.000	4,352	4,266		4,266	3,497	3,428	3.1	3.0	3,500	3,431				
	R11	3	0.971	1.000	6,528	6,336		6,336	3,497	3,394	4.7	4.5	3,502	3,399				
	R12	4	0.961	1.000	8,704	8,364		8,364	3,497	3,361	6.2	6.0	3,503	3,366				
	R13	5	0.951	1.000	10,880	10,352		10,352	3,497	3,327	7.8	7.4	3,505	3,335				
	R14	6	0.942	1.000	13,056	12,299		12,299	4,266	4,019	9.3	8.8	4,275	4,027				
施設完成後の評価期間(50年)	R15	7	0.933		15,232	14,207		14,207			9.3	8.7	9.3	8.7				
	R16	8	0.923		15,232	14,066		14,066			9.3	8.6	9.3	8.6				
	R17	9	0.914		15,232	13,927		13,927			9.3	8.5	9.3	8.5				
	R18	10	0.905		15,232	13,789		13,789			9.3	8.4	9.3	8.4				
	R19	11	0.896		15,232	13,652		13,652			9.3	8.3	9.3	8.3				
	R20	12	0.887		15,232	13,517		13,517			9.3	8.3	9.3	8.3				
	R21	13	0.879		15,232	13,383		13,383			9.3	8.2	9.3	8.2				
	R22	14	0.870		15,232	13,251		13,251			9.3	8.1	9.3	8.1				
	R23	15	0.861		15,232	13,120		13,120			9.3	8.0	9.3	8.0				
	R24	16	0.853		15,232	12,990		12,990			9.3	7.9	9.3	7.9				
	R25	17	0.844		15,232	12,861		12,861			9.3	7.9	9.3	7.9				
	R26	18	0.836		15,232	12,734		12,734			9.3	7.8	9.3	7.8				
	R27	19	0.828		15,232	12,608		12,608			9.3	7.7	9.3	7.7				
	R28	20	0.820		15,232	12,483		12,483			9.3	7.6	9.3	7.6				
	R29	21	0.811		15,232	12,359		12,359			9.3	7.5	9.3	7.5				
	R30	22	0.803		15,232	12,237		12,237			9.3	7.5	9.3	7.5				
	R31	23	0.795		15,232	12,116		12,116			9.3	7.4	9.3	7.4				
	R32	24	0.788		15,232	11,996		11,996			9.3	7.3	9.3	7.3				
	R33	25	0.780		15,232	11,877		11,877			9.3	7.3	9.3	7.3				
	R34	26	0.772		15,232	11,760		11,760			9.3	7.2	9.3	7.2				
	R35	27	0.764		15,232	11,643		11,643			9.3	7.1	9.3	7.1				
	R36	28	0.757		15,232	11,528		11,528			9.3	7.0	9.3	7.0				
	R37	29	0.749		15,232	11,414		11,414			9.3	7.0	9.3	7.0				
	R38	30	0.742		15,232	11,301		11,301			9.3	6.9	9.3	6.9				
	R39	31	0.735		15,232	11,189		11,189			9.3	6.8	9.3	6.8				
	R40	32	0.727		15,232	11,078		11,078			9.3	6.8	9.3	6.8				
	R41	33	0.720		15,232	10,968		10,968			9.3	6.7	9.3	6.7				
	R42	34	0.713		15,232	10,860		10,860			9.3	6.6	9.3	6.6				
	R43	35	0.706		15,232	10,752		10,752			9.3	6.6	9.3	6.6				
	R44	36	0.699		15,232	10,646		10,646			9.3	6.5	9.3	6.5				
	R45	37	0.692		15,232	10,540		10,540			9.3	6.4	9.3	6.4				
	R46	38	0.685		15,232	10,436		10,436			9.3	6.4	9.3	6.4				
	R47	39	0.678		15,232	10,333		10,333			9.3	6.3	9.3	6.3				
	R48	40	0.672		15,232	10,230		10,230			9.3	6.2	9.3	6.2				
	R49	41	0.665		15,232	10,129		10,129			9.3	6.2	9.3	6.2				
	R50	42	0.658		15,232	10,029		10,029			9.3	6.1	9.3	6.1				
	R51	43	0.652		15,232	9,929		9,929			9.3	6.1	9.3	6.1				
	R52	44	0.645		15,232	9,831		9,831			9.3	6.0	9.3	6.0				
	R53	45	0.639		15,232	9,734		9,734			9.3	5.9	9.3	5.9				
	R54	46	0.633		15,232	9,637		9,637			9.3	5.9	9.3	5.9				
	R55	47	0.626		15,232	9,542		9,542			9.3	5.8	9.3	5.8				
	R56	48	0.620		15,232	9,448		9,448			9.3	5.8	9.3	5.8				
	R57	49	0.614		15,232	9,354		9,354			9.3	5.7	9.3	5.7				
	R58	50	0.608		15,232	9,261		9,261			9.3	5.7	9.3	5.7				
	R59	51	0.602		15,232	9,170		9,170			9.3	5.6	9.3	5.6				
	R60	52	0.596		15,232	9,079		9,079			9.3	5.5	9.3	5.5				
	R61	53	0.590		15,232	8,989		8,989			9.3	5.5	9.3	5.5				
	R62	54	0.584		15,232	8,900		8,900			9.3	5.4	9.3	5.4				
	R63	55	0.579		15,232	8,812		8,812			9.3	5.4	9.3	5.4				
	R64	56	0.573		15,232	8,725		8,725			9.3	5.3	9.3	5.3				
合計					807,275	606,191	10,560	616,751-B	26,041	25,277	498	375	26,539	25,652-C	24.0	591,099	57.8%	

多摩川直轄河川改修事業(全体事業)

単位:百万円

	被害軽減効果 総便益	残存価値	総便益	総建設費	総維持管理費	総事業費	費用便益比	備考
	①	②	③(①+②)	④	⑤	⑥(④+⑤)	⑦(③／⑥)	
基本	1,139,991	3,732	1,143,723	79,197	634	79,831	14.3	
資産+10%	1,242,594	3,732	1,246,326	79,197	634	79,831	15.6	
資産-10%	1,037,388	3,732	1,041,120	79,197	634	79,831	13.0	
工期+10%	1,107,338	3,318	1,110,656	75,188	671	75,859	14.6	残工期:30年→33年
工期-10%	1,174,554	4,199	1,178,753	83,517	593	84,110	14.0	残工期:30年→27年
事業費+10%	1,139,991	4,106	1,144,097	87,117	634	87,751	13.0	
事業費-10%	1,139,991	3,359	1,143,350	71,278	634	71,911	15.9	

様式-5 費用対便益
全体事業(資産+10%)

水系名:多摩川

河川名:多摩川、浅川

単位:百万円

年次	年度	t	割引率	デフレーター	便益			費用						費用便益比	純現在価値	経済的 内部 収益率	
					便益①		残存価値 ②	計 ①+②	建設費③		維持管理費④		計③+④				
					便益	現在価値			費用	現在価値	費用	現在価値	費用				現在価値
基準	R08	0	1.000	1.000													
施設整備期間 (30年)	R08	0	1.000	1.000	0	0		0	3,894	3,894	0.0	0.0	3,894	3,894			
	R09	1	0.962	1.000	2,369	2,278		2,278	3,894	3,744	1.6	1.5	3,895	3,745			
	R10	2	0.925	1.000	4,738	4,380		4,380	3,497	3,233	3.1	2.9	3,500	3,236			
	R11	3	0.889	1.000	7,107	6,318		6,318	3,497	3,109	4.7	4.1	3,502	3,113			
	R12	4	0.855	1.000	9,475	8,100		8,100	3,497	2,989	6.2	5.3	3,503	2,995			
	R13	5	0.822	1.000	11,844	9,735		9,735	3,497	2,874	7.8	6.4	3,505	2,881			
	R14	6	0.790	1.000	14,213	11,233		11,233	4,266	3,371	9.3	7.3	4,275	3,379			
	R15	7	0.760	1.000	16,582	12,601		12,601	4,071	3,094	10.9	8.2	4,082	3,102			
	R16	8	0.731	1.000	19,914	14,551		14,551	4,071	2,975	12.4	9.1	4,084	2,984			
	R17	9	0.703	1.000	23,246	16,332		16,332	4,071	2,861	14.0	9.8	4,085	2,870			
	R18	10	0.676	1.000	26,578	17,955		17,955	4,071	2,750	15.5	10.5	4,087	2,761			
	R19	11	0.650	1.000	29,910	19,429		19,429	4,071	2,645	17.1	11.1	4,088	2,656			
	R20	12	0.625	1.000	33,242	20,763		20,763	4,071	2,543	18.6	11.6	4,090	2,555			
	R21	13	0.601	1.000	36,574	21,965		21,965	5,293	3,179	20.2	12.1	5,313	3,191			
	R22	14	0.577	1.000	39,906	23,045		23,045	5,293	3,056	21.7	12.5	5,314	3,069			
	R23	15	0.555	1.000	43,238	24,009		24,009	5,293	2,939	23.3	12.9	5,316	2,952			
	R24	16	0.534	1.000	46,570	24,864		24,864	4,071	2,174	24.8	13.2	4,096	2,187			
	R25	17	0.513	1.000	49,902	25,618		25,618	4,071	2,090	26.4	13.5	4,098	2,104			
	R26	18	0.494	1.000	53,234	26,278		26,278	4,071	2,010	27.9	13.8	4,099	2,024			
	R27	19	0.475	1.000	56,566	26,849		26,849	4,071	1,932	29.5	14.0	4,101	1,946			
	R28	20	0.456	1.000	59,898	27,337		27,337	5,646	2,577	31.0	14.1	5,677	2,591			
	R29	21	0.439	1.000	63,230	27,747		27,747	5,646	2,478	32.6	14.3	5,678	2,492			
	R30	22	0.422	1.000	66,562	28,086		28,086	5,646	2,382	34.1	14.4	5,680	2,397			
	R31	23	0.406	1.000	69,894	28,358		28,358	5,646	2,291	35.7	14.5	5,682	2,305			
	R32	24	0.390	1.000	73,226	28,567		28,567	5,646	2,203	37.2	14.5	5,683	2,217			
	R33	25	0.375	1.000	76,558	28,718		28,718	5,646	2,118	38.8	14.5	5,685	2,132			
	R34	26	0.361	1.000	79,890	28,815		28,815	5,646	2,036	40.3	14.5	5,686	2,051			
	R35	27	0.347	1.000	83,222	28,863		28,863	5,646	1,958	41.9	14.5	5,688	1,973			
	R36	28	0.333	1.000	86,554	28,864		28,864	5,646	1,883	43.4	14.5	5,689	1,897			
	R37	29	0.321	1.000	89,886	28,822		28,822	5,646	1,810	45.0	14.4	5,691	1,825			
	施設完成後の 評価期間 (50年)	R38	30	0.308		93,218	28,741		28,741			45.0	13.9	45.0	13.9		
		R39	31	0.296		93,218	27,635		27,635			45.0	13.3	45.0	13.3		
		R40	32	0.285		93,218	26,573		26,573			45.0	12.8	45.0	12.8		
		R41	33	0.274		93,218	25,551		25,551			45.0	12.3	45.0	12.3		
		R42	34	0.264		93,218	24,568		24,568			45.0	11.8	45.0	11.8		
		R43	35	0.253		93,218	23,623		23,623			45.0	11.4	45.0	11.4		
		R44	36	0.244		93,218	22,714		22,714			45.0	11.0	45.0	11.0		
R45		37	0.234		93,218	21,841		21,841			45.0	10.5	45.0	10.5			
R46		38	0.225		93,218	21,001		21,001			45.0	10.1	45.0	10.1			
R47		39	0.217		93,218	20,193		20,193			45.0	9.7	45.0	9.7			
R48		40	0.208		93,218	19,416		19,416			45.0	9.4	45.0	9.4			
R49		41	0.200		93,218	18,670		18,670			45.0	9.0	45.0	9.0			
R50		42	0.193		93,218	17,951		17,951			45.0	8.7	45.0	8.7			
R51		43	0.185		93,218	17,261		17,261			45.0	8.3	45.0	8.3			
R52		44	0.178		93,218	16,597		16,597			45.0	8.0	45.0	8.0			
R53		45	0.171		93,218	15,959		15,959			45.0	7.7	45.0	7.7			
R54		46	0.165		93,218	15,345		15,345			45.0	7.4	45.0	7.4			
R55		47	0.158		93,218	14,755		14,755			45.0	7.1	45.0	7.1			
R56		48	0.152		93,218	14,187		14,187			45.0	6.8	45.0	6.8			
R57		49	0.146		93,218	13,642		13,642			45.0	6.6	45.0	6.6			
R58		50	0.141		93,218	13,117		13,117			45.0	6.3	45.0	6.3			
R59		51	0.135		93,218	12,612		12,612			45.0	6.1	45.0	6.1			
R60		52	0.130		93,218	12,127		12,127			45.0	5.8	45.0	5.8			
R61		53	0.125		93,218	11,661		11,661			45.0	5.6	45.0	5.6			
R62		54	0.120		93,218	11,212		11,212			45.0	5.4	45.0	5.4			
R63		55	0.116		93,218	10,781		10,781			45.0	5.2	45.0	5.2			
R64		56	0.111		93,218	10,367		10,367			45.0	5.0	45.0	5.0			
R65		57	0.107		93,218	9,968		9,968			45.0	4.8	45.0	4.8			
R66		58	0.103		93,218	9,584		9,584			45.0	4.6	45.0	4.6			
R67		59	0.099		93,218	9,216		9,216			45.0	4.4	45.0	4.4			
R68		60	0.095		93,218	8,861		8,861			45.0	4.3	45.0	4.3			
R69		61	0.091		93,218	8,521		8,521			45.0	4.1	45.0	4.1			
R70		62	0.088		93,218	8,193		8,193			45.0	4.0	45.0	4.0			
R71		63	0.085		93,218	7,878		7,878			45.0	3.8	45.0	3.8			
R72		64	0.081		93,218	7,575		7,575			45.0	3.7	45.0	3.7			
R73		65	0.078		93,218	7,283		7,283			45.0	3.5	45.0	3.5			
R74		66	0.075		93,218	7,003		7,003			45.0	3.4	45.0	3.4			
R75		67	0.072		93,218	6,734		6,734			45.0	3.2	45.0	3.2			
R76		68	0.069		93,218	6,475		6,475			45.0	3.1	45.0	3.1			
R77		69	0.067		93,218	6,226		6,226			45.0	3.0	45.0	3.0			
R78		70	0.064		93,218	5,986		5,986			45.0	2.9	45.0	2.9			
R79		71	0.062		93,218	5,756		5,756			45.0	2.8	45.0	2.8			
R80		72	0.059		93,218	5,535		5,535			45.0	2.7	45.0	2.7			
R81		73	0.057		93,218	5,322		5,322			45.0	2.6	45.0	2.6			
R82		74	0.055		93,218	5,117		5,117			45.0	2.5	45.0	2.5			
R83		75	0.053		93,218	4,920		4,920			45.0	2.4	45.0	2.4			
R84		76	0.051		93,218	4,731		4,731			45.0	2.3	45.0	2.3			
R85		77	0.049		93,218	4,549		4,549			45.0	2.2	45.0	2.2			
R86		78	0.047		93,218	4,374		4,374			45.0	2.1	45.0	2.1			
R87		79	0.045		93,218	4,206		4,206			45.0	2.0	45.0	2.0			
合計					5,935,031	1,242,594	3,732	1,246,326=B	139,092	79,197	2,922	634	142,014	79,831=C	15.6	1,166,494	63.4%

様式-5 費用対便益
全体事業(資産-10%)

水系名:多摩川

河川名:多摩川、浅川

単位:百万円

年次	年度	t	割引率	デフレーター	便益			費用				費用便益比	純現在価値	経済的 内部 収益率				
					便益①		残存価値 ②	計 ①+②	建設費③		維持管理費④				計③+④			
					便益	現在価値			費用	現在価値	費用				現在価値	費用	現在価値	
基準	R08	0	1.000	1.000														
施設整備期間 (30年)	R08	0	1.000	1.000	0	0		0	3,894	3,894	0.0	0.0	3,894	3,894				
	R09	1	0.962	1.000	1,983	1,907		1,907	3,894	3,744	1.6	1.5	3,895	3,745				
	R10	2	0.925	1.000	3,966	3,667		3,667	3,497	3,233	3.1	2.9	3,500	3,236				
	R11	3	0.889	1.000	5,949	5,289		5,289	3,497	3,109	4.7	4.1	3,502	3,113				
	R12	4	0.855	1.000	7,932	6,780		6,780	3,497	2,989	6.2	5.3	3,503	2,995				
	R13	5	0.822	1.000	9,915	8,149		8,149	3,497	2,874	7.8	6.4	3,505	2,881				
	R14	6	0.790	1.000	11,898	9,403		9,403	4,266	3,371	9.3	7.3	4,275	3,379				
	R15	7	0.760	1.000	13,881	10,549		10,549	4,071	3,094	10.9	8.2	4,082	3,102				
	R16	8	0.731	1.000	16,660	12,173		12,173	4,071	2,975	12.4	9.1	4,084	2,984				
	R17	9	0.703	1.000	19,439	13,657		13,657	4,071	2,861	14.0	9.8	4,085	2,870				
	R18	10	0.676	1.000	22,217	15,009		15,009	4,071	2,750	15.5	10.5	4,087	2,761				
	R19	11	0.650	1.000	24,996	16,237		16,237	4,071	2,645	17.1	11.1	4,088	2,656				
	R20	12	0.625	1.000	27,775	17,348		17,348	4,071	2,543	18.6	11.6	4,090	2,555				
	R21	13	0.601	1.000	30,554	18,350		18,350	5,293	3,179	20.2	12.1	5,313	3,191				
	R22	14	0.577	1.000	33,333	19,249		19,249	5,293	3,056	21.7	12.5	5,314	3,069				
	R23	15	0.555	1.000	36,111	20,051		20,051	5,293	2,939	23.3	12.9	5,316	2,952				
	R24	16	0.534	1.000	38,890	20,764		20,764	4,071	2,174	24.8	13.2	4,096	2,187				
	R25	17	0.513	1.000	41,669	21,392		21,392	4,071	2,090	26.4	13.5	4,098	2,104				
	R26	18	0.494	1.000	44,448	21,941		21,941	4,071	2,010	27.9	13.8	4,099	2,024				
	R27	19	0.475	1.000	47,226	22,416		22,416	4,071	1,932	29.5	14.0	4,101	1,946				
	R28	20	0.456	1.000	50,005	22,822		22,822	5,646	2,577	31.0	14.1	5,677	2,591				
	R29	21	0.439	1.000	52,784	23,163		23,163	5,646	2,478	32.6	14.3	5,678	2,492				
	R30	22	0.422	1.000	55,563	23,445		23,445	5,646	2,382	34.1	14.4	5,680	2,397				
	R31	23	0.406	1.000	58,342	23,671		23,671	5,646	2,291	35.7	14.5	5,682	2,305				
	R32	24	0.390	1.000	61,120	23,844		23,844	5,646	2,203	37.2	14.5	5,683	2,217				
	R33	25	0.375	1.000	63,899	23,970		23,970	5,646	2,118	38.8	14.5	5,685	2,132				
	R34	26	0.361	1.000	66,678	24,050		24,050	5,646	2,036	40.3	14.5	5,686	2,051				
	R35	27	0.347	1.000	69,457	24,089		24,089	5,646	1,958	41.9	14.5	5,688	1,973				
	R36	28	0.333	1.000	72,235	24,089		24,089	5,646	1,883	43.4	14.5	5,689	1,897				
	R37	29	0.321	1.000	75,014	24,053		24,053	5,646	1,810	45.0	14.4	5,691	1,825				
	施設完成後の 評価期間 (50年)	R38	30	0.308		77,793	23,985		23,985			45.0	13.9	45.0	13.9			
		R39	31	0.296		77,793	23,063		23,063			45.0	13.3	45.0	13.3			
		R40	32	0.285		77,793	22,176		22,176			45.0	12.8	45.0	12.8			
		R41	33	0.274		77,793	21,323		21,323			45.0	12.3	45.0	12.3			
		R42	34	0.264		77,793	20,503		20,503			45.0	11.8	45.0	11.8			
		R43	35	0.253		77,793	19,714		19,714			45.0	11.4	45.0	11.4			
		R44	36	0.244		77,793	18,956		18,956			45.0	11.0	45.0	11.0			
R45		37	0.234		77,793	18,227		18,227			45.0	10.5	45.0	10.5				
R46		38	0.225		77,793	17,526		17,526			45.0	10.1	45.0	10.1				
R47		39	0.217		77,793	16,852		16,852			45.0	9.7	45.0	9.7				
R48		40	0.208		77,793	16,203		16,203			45.0	9.4	45.0	9.4				
R49		41	0.200		77,793	15,580		15,580			45.0	9.0	45.0	9.0				
R50		42	0.193		77,793	14,981		14,981			45.0	8.7	45.0	8.7				
R51		43	0.185		77,793	14,405		14,405			45.0	8.3	45.0	8.3				
R52		44	0.178		77,793	13,851		13,851			45.0	8.0	45.0	8.0				
R53		45	0.171		77,793	13,318		13,318			45.0	7.7	45.0	7.7				
R54		46	0.165		77,793	12,806		12,806			45.0	7.4	45.0	7.4				
R55		47	0.158		77,793	12,313		12,313			45.0	7.1	45.0	7.1				
R56		48	0.152		77,793	11,840		11,840			45.0	6.8	45.0	6.8				
R57		49	0.146		77,793	11,384		11,384			45.0	6.6	45.0	6.6				
R58		50	0.141		77,793	10,946		10,946			45.0	6.3	45.0	6.3				
R59		51	0.135		77,793	10,525		10,525			45.0	6.1	45.0	6.1				
R60		52	0.130		77,793	10,121		10,121			45.0	5.8	45.0	5.8				
R61		53	0.125		77,793	9,731		9,731			45.0	5.6	45.0	5.6				
R62		54	0.120		77,793	9,357		9,357			45.0	5.4	45.0	5.4				
R63		55	0.116		77,793	8,997		8,997			45.0	5.2	45.0	5.2				
R64		56	0.111		77,793	8,651		8,651			45.0	5.0	45.0	5.0				
R65		57	0.107		77,793	8,318		8,318			45.0	4.8	45.0	4.8				
R66		58	0.103		77,793	7,998		7,998			45.0	4.6	45.0	4.6				
R67		59	0.099		77,793	7,691		7,691			45.0	4.4	45.0	4.4				
R68		60	0.095		77,793	7,395		7,395			45.0	4.3	45.0	4.3				
R69		61	0.091		77,793	7,111		7,111			45.0	4.1	45.0	4.1				
R70		62	0.088		77,793	6,837		6,837			45.0	4.0	45.0	4.0				
R71		63	0.085		77,793	6,574		6,574			45.0	3.8	45.0	3.8				
R72		64	0.081		77,793	6,321		6,321			45.0	3.7	45.0	3.7				
R73		65	0.078		77,793	6,078		6,078			45.0	3.5	45.0	3.5				
R74		66	0.075		77,793	5,844		5,844			45.0	3.4	45.0	3.4				
R75		67	0.072		77,793	5,620		5,620			45.0	3.2	45.0	3.2				
R76		68	0.069		77,793	5,403		5,403			45.0	3.1	45.0	3.1				
R77		69	0.067		77,793	5,196		5,196			45.0	3.0	45.0	3.0				
R78		70	0.064		77,793	4,996		4,996			45.0	2.9	45.0	2.9				
R79		71	0.062		77,793	4,804		4,804			45.0	2.8	45.0	2.8				
R80		72	0.059		77,793	4,619		4,619			45.0	2.7	45.0	2.7				
R81		73	0.057		77,793	4,441		4,441			45.0	2.6	45.0	2.6				
R82		74	0.055		77,793	4,270		4,270			45.0	2.5	45.0	2.5				
R83		75	0.053		77,793	4,106		4,106			45.0	2.4	45.0	2.4				
R84		76	0.051		77,793	3,948		3,948			45.0	2.3	45.0	2.3				
R85		77	0.049		77,793	3,796		3,796			45.0	2.2	45.0	2.2				
R86		78	0.047		77,793	3,650		3,650			45.0	2.1	45.0	2.1				
R87		79	0.045		77,793	3,510		3,510			45.0	2.0	45.0	2.0				
合計					4,953,591	1,037,388	3,732	1,041,120=B	139,092	79,197	2,922	634	142,014	79,831=C	13.0	961,289	53.5%	

全体事業（工期10%）								費用						単位：百万円		経済的	
年次	年度	t	割引率	デフ レー ター	便益			費用						費用 便益比	純現在 価値	内部 収益率	
					便益①		残存価値	計	建設費③		維持管理費④		計③+④				
				便益		現在価値	②	①+②	費用	現在価値	費用	現在価値	費用	現在価値	B/C	B-C	EIRR
施設 整備 期間 （33年）	R08	0	1.000	1.000		0		0	3,540	3,540	0.0	0.0	3,540	3,540			
	R09	1	0.962	1.000	2,176	2,092		2,092	3,540	3,404	1.6	1.5	3,541	3,405			
	R10	2	0.925	1.000	4,352	4,024		4,024	3,251	3,006	3.1	2.9	3,254	3,009			
	R11	3	0.889	1.000	6,528	5,803		5,803	3,179	2,826	4.7	4.1	3,184	2,830			
	R12	4	0.855	1.000	8,704	7,440		7,440	3,179	2,717	6.2	5.3	3,185	2,723			
	R13	5	0.822	1.000	10,880	8,942		8,942	3,179	2,613	7.8	6.4	3,187	2,619			
	R14	6	0.790	1.000	13,056	10,318		10,318	3,459	2,733	9.3	7.3	3,468	2,741			
	R15	7	0.760	1.000	15,232	11,575		11,575	3,825	2,907	10.9	8.2	3,836	2,915			
	R16	8	0.731	1.000	17,934	13,105		13,105	3,701	2,704	12.4	9.1	3,714	2,714			
	R17	9	0.703	1.000	20,637	14,499		14,499	3,701	2,600	14.0	9.8	3,715	2,610			
	R18	10	0.676	1.000	23,340	15,768		15,768	3,701	2,500	15.5	10.5	3,717	2,511			
	R19	11	0.650	1.000	26,043	16,917		16,917	3,701	2,404	17.1	11.1	3,718	2,415			
	R20	12	0.625	1.000	28,746	17,955		17,955	3,701	2,312	18.6	11.6	3,720	2,323			
	R21	13	0.601	1.000	31,449	18,887		18,887	3,701	2,223	20.2	12.1	3,721	2,235			
	R22	14	0.577	1.000	34,152	19,722		19,722	4,478	2,586	21.7	12.5	4,500	2,599			
	R23	15	0.555	1.000	36,854	20,464		20,464	4,811	2,672	23.3	12.9	4,835	2,685			
	R24	16	0.534	1.000	39,557	21,120		21,120	4,811	2,569	24.8	13.2	4,836	2,582			
	R25	17	0.513	1.000	42,260	21,695		21,695	4,367	2,242	26.4	13.5	4,394	2,256			
	R26	18	0.494	1.000	44,963	22,195		22,195	3,701	1,827	27.9	13.8	3,729	1,841			
	R27	19	0.475	1.000	47,666	22,624		22,624	3,701	1,757	29.5	14.0	3,731	1,771			
	R28	20	0.456	1.000	50,369	22,988		22,988	3,701	1,689	31.0	14.1	3,732	1,703			
	R29	21	0.439	1.000	53,071	23,290		23,290	3,701	1,624	32.6	14.3	3,734	1,639			
	R30	22	0.422	1.000	55,774	23,534		23,534	5,133	2,166	34.1	14.4	5,167	2,180			
	R31	23	0.406	1.000	58,477	23,726		23,726	5,133	2,082	35.7	14.5	5,168	2,097			
	R32	24	0.390	1.000	61,180	23,868		23,868	5,133	2,002	37.2	14.5	5,170	2,017			
	R33	25	0.375	1.000	63,883	23,964		23,964	5,133	1,925	38.8	14.5	5,171	1,940			
	R34	26	0.361	1.000	66,586	24,017		24,017	5,133	1,851	40.3	14.5	5,173	1,866			
	R35	27	0.347	1.000	69,288	24,030		24,030	5,133	1,780	41.9	14.5	5,174	1,795			
	R36	28	0.333	1.000	71,991	24,007		24,007	5,133	1,712	43.4	14.5	5,176	1,726			
	R37	29	0.321	1.000	74,694	23,951		23,951	5,133	1,646	45.0	14.4	5,178	1,660			
	R38	30	0.308	1.000	77,397	23,863		23,863	5,133	1,582	46.5	14.3	5,179	1,597			
	R39	31	0.296	1.000	80,100	23,746		23,746	5,133	1,522	48.1	14.2	5,181	1,536			
	R40	32	0.285	1.000	82,803	23,604		23,604	5,133	1,463	49.6	14.1	5,182	1,477			
施設 完成 後の 評価 期間 （50年）	R41	33	0.274		85,506	23,437		23,437			49.6	13.6	49.6	13.6			
	R42	34	0.264		85,506	22,535		22,535			49.6	13.1	49.6	13.1			
	R43	35	0.253		85,506	21,668		21,668			49.6	12.6	49.6	12.6			
	R44	36	0.244		85,506	20,835		20,835			49.6	12.1	49.6	12.1			
	R45	37	0.234		85,506	20,034		20,034			49.6	11.6	49.6	11.6			
	R46	38	0.225		85,506	19,263		19,263			49.6	11.2	49.6	11.2			
	R47	39	0.217		85,506	18,522		18,522			49.6	10.7	49.6	10.7			
	R48	40	0.208		85,506	17,810		17,810			49.6	10.3	49.6	10.3			
	R49	41	0.200		85,506	17,125		17,125			49.6	9.9	49.6	9.9			
	R50	42	0.193		85,506	16,466		16,466			49.6	9.6	49.6	9.6			
	R51	43	0.185		85,506	15,833		15,833			49.6	9.2	49.6	9.2			
	R52	44	0.178		85,506	15,224		15,224			49.6	8.8	49.6	8.8			
	R53	45	0.171		85,506	14,638		14,638			49.6	8.5	49.6	8.5			
	R54	46	0.165		85,506	14,075		14,075			49.6	8.2	49.6	8.2			
	R55	47	0.158		85,506	13,534		13,534			49.6	7.9	49.6	7.9			
	R56	48	0.152		85,506	13,013		13,013			49.6	7.5	49.6	7.5			
	R57	49	0.146		85,506	12,513		12,513			49.6	7.3	49.6	7.3			
	R58	50	0.141		85,506	12,032		12,032			49.6	7.0	49.6	7.0			
	R59	51	0.135		85,506	11,569		11,569			49.6	6.7	49.6	6.7			
	R60	52	0.130		85,506	11,124		11,124			49.6	6.5	49.6	6.5			
	R61	53	0.125		85,506	10,696		10,696			49.6	6.2	49.6	6.2			
	R62	54	0.120		85,506	10,285		10,285			49.6	6.0	49.6	6.0			
	R63	55	0.116		85,506	9,889		9,889			49.6	5.7	49.6	5.7			
	R64	56	0.111		85,506	9,509		9,509			49.6	5.5	49.6	5.5			
	R65	57	0.107		85,506	9,143		9,143			49.6	5.3	49.6	5.3			
	R66	58	0.103		85,506	8,791		8,791			49.6	5.1	49.6	5.1			
	R67	59	0.099		85,506	8,453		8,453			49.6	4.9	49.6	4.9			
	R68	60	0.095		85,506	8,128		8,128			49.6	4.7	49.6	4.7			
	R69	61	0.091		85,506	7,816		7,816			49.6	4.5	49.6	4.5			
	R70	62	0.088		85,506	7,515		7,515			49.6	4.4	49.6	4.4			
	R71	63	0.085		85,506	7,226		7,226			49.6	4.2	49.6	4.2			
	R72	64	0.081		85,506	6,948		6,948			49.6	4.0	49.6	4.0			
	R73	65	0.078		85,506	6,681		6,681			49.6	3.9	49.6	3.9			
	R74	66	0.075		85,506	6,424		6,424			49.6	3.7	49.6	3.7			
	R75	67	0.072		85,506	6,177		6,177			49.6	3.6	49.6	3.6			
	R76	68	0.069		85,506	5,939		5,939			49.6	3.4	49.6	3.4			
	R77	69	0.067		85,506	5,711		5,711			49.6	3.3	49.6	3.3			
	R78	70	0.064		85,506	5,491		5,491			49.6	3.2	49.6	3.2			
	R79	71	0.062		85,506	5,280		5,280			49.6	3.1	49.6	3.1			
	R80	72	0.059		85,506	5,077		5,077			49.6	2.9	49.6	2.9			
	R81	73	0.057		85,506	4,882		4,882			49.6	2.8	49.6	2.8			
	R82	74	0.055		85,506	4,694		4,694			49.6	2.7	49.6	2.7			
	R83	75	0.053		85,506	4,513		4,513			49.6	2.6	49.6	2.6			
	R84	76	0.051		85,506	4,340		4,340			49.6	2.5	49.6	2.5			
	R85	77	0.049		85,506	4,173		4,173			49.6	2.4	49.6	2.4			
	R86	78	0.047		85,506	4,012		4,012			49.6	2.3	49.6	2.3			
	R87	79	0.045		85,506	3,858		3,858			49.6	2.2	49.6	2.2			
	R88	80	0.043		85,506	3,710		3,710			49.6	2.2	49.6	2.2			
	R89	81	0.042		85,506	3,567		3,567			49.6	2.1	49.6	2.1			
	R90	82	0.040		85,506	3,430		3,430			49.6	2.0	49.6	2.0			
合計					5,595,417	1,107,338	3,318	1,110,656-B	139,092	75,188	3,298	671	142,391	75,859-C	14.6	1,034,797	63.7%

様式-5 費用対便益

水系名:多摩川

河川名:多摩川、浅川

単位:百万円

全体事業(工期-10%)

年次	年度	t	割引率	デフ レー ター	便益				費用				費用 便益比	純現在 価値	経済的 内部 収益率		
					便益①		残存価値	計	建設費③		維持管理費④					計③+④	
					便益	現在価値			②	①×②	費用	現在価値				費用	現在価値
基準	R08	0	1.000	1.000											B/C	B-C	EIRR
施設整備期間（30年）	R08	0	1.000	1.000	0	0		0	4,326	4,326	0.0	0.0	4,326	4,326			
	R09	1	0.962	1.000	2,176	2,092		2,092	4,238	4,075	1.6	1.5	4,240	4,077			
	R10	2	0.925	1.000	4,352	4,024		4,024	3,886	3,592	3.1	2.9	3,889	3,595			
	R11	3	0.889	1.000	6,528	5,803		5,803	3,886	3,454	4.7	4.1	3,890	3,458			
	R12	4	0.855	1.000	8,704	7,440		7,440	3,886	3,321	6.2	5.3	3,892	3,327			
	R13	5	0.822	1.000	10,880	8,942		8,942	4,398	3,615	7.8	6.4	4,406	3,621			
	R14	6	0.790	1.000	13,056	10,318		10,318	4,589	3,626	9.3	7.3	4,598	3,634			
	R15	7	0.760	1.000	15,232	11,575		11,575	4,524	3,438	10.9	8.2	4,535	3,446			
	R16	8	0.731	1.000	18,745	13,697		13,697	4,524	3,305	12.4	9.1	4,536	3,315			
	R17	9	0.703	1.000	22,259	15,639		15,639	4,524	3,178	14.0	9.8	4,538	3,188			
	R18	10	0.676	1.000	25,773	17,411		17,411	4,524	3,056	15.5	10.5	4,539	3,067			
	R19	11	0.650	1.000	29,286	19,024		19,024	4,931	3,203	17.1	11.1	4,948	3,214			
	R20	12	0.625	1.000	32,800	20,487		20,487	5,881	3,673	18.6	11.6	5,899	3,685			
	R21	13	0.601	1.000	36,314	21,809		21,809	5,881	3,532	20.2	12.1	5,901	3,544			
	R22	14	0.577	1.000	39,827	22,999		22,999	5,067	2,926	21.7	12.5	5,088	2,938			
	R23	15	0.555	1.000	43,341	24,066		24,066	4,524	2,512	23.3	12.9	4,547	2,525			
	R24	16	0.534	1.000	46,855	25,016		25,016	4,524	2,415	24.8	13.2	4,549	2,429			
	R25	17	0.513	1.000	50,369	25,858		25,858	4,524	2,322	26.4	13.5	4,550	2,336			
	R26	18	0.494	1.000	53,882	26,598		26,598	6,273	3,097	27.9	13.8	6,301	3,110			
	R27	19	0.475	1.000	57,396	27,243		27,243	6,273	2,978	29.5	14.0	6,303	2,992			
	R28	20	0.456	1.000	60,910	27,798		27,798	6,273	2,863	31.0	14.1	6,304	2,877			
	R29	21	0.439	1.000	64,423	28,271		28,271	6,273	2,753	32.6	14.3	6,306	2,767			
	R30	22	0.422	1.000	67,937	28,666		28,666	6,273	2,647	34.1	14.4	6,307	2,661			
	R31	23	0.406	1.000	71,451	28,989		28,989	6,273	2,545	35.7	14.5	6,309	2,560			
	R32	24	0.390	1.000	74,964	29,245		29,245	6,273	2,447	37.2	14.5	6,310	2,462			
	R33	25	0.375	1.000	78,478	29,438		29,438	6,273	2,353	38.8	14.5	6,312	2,368			
	R34	26	0.361	1.000	81,992	29,574		29,574	6,273	2,263	40.3	14.5	6,314	2,277			
	施設完成後の評価期間（50年）	R35	27	0.347		85,506	29,655		29,655			40.3	14.0	40.3	14.0		
R36		28	0.333		85,506	28,514		28,514			40.3	13.4	40.3	13.4			
R37		29	0.321		85,506	27,417		27,417			40.3	12.9	40.3	12.9			
R38		30	0.308		85,506	26,363		26,363			40.3	12.4	40.3	12.4			
R39		31	0.296		85,506	25,349		25,349			40.3	11.9	40.3	11.9			
R40		32	0.285		85,506	24,374		24,374			40.3	11.5	40.3	11.5			
R41		33	0.274		85,506	23,437		23,437			40.3	11.0	40.3	11.0			
R42		34	0.264		85,506	22,535		22,535			40.3	10.6	40.3	10.6			
R43		35	0.253		85,506	21,668		21,668			40.3	10.2	40.3	10.2			
R44		36	0.244		85,506	20,835		20,835			40.3	9.8	40.3	9.8			
R45		37	0.234		85,506	20,034		20,034			40.3	9.4	40.3	9.4			
R46		38	0.225		85,506	19,263		19,263			40.3	9.1	40.3	9.1			
R47		39	0.217		85,506	18,522		18,522			40.3	8.7	40.3	8.7			
R48		40	0.208		85,506	17,810		17,810			40.3	8.4	40.3	8.4			
R49		41	0.200		85,506	17,125		17,125			40.3	8.1	40.3	8.1			
R50		42	0.193		85,506	16,466		16,466			40.3	7.8	40.3	7.8			
R51		43	0.185		85,506	15,833		15,833			40.3	7.5	40.3	7.5			
R52		44	0.178		85,506	15,224		15,224			40.3	7.2	40.3	7.2			
R53		45	0.171		85,506	14,638		14,638			40.3	6.9	40.3	6.9			
R54		46	0.165		85,506	14,075		14,075			40.3	6.6	40.3	6.6			
R55		47	0.158		85,506	13,534		13,534			40.3	6.4	40.3	6.4			
R56		48	0.152		85,506	13,013		13,013			40.3	6.1	40.3	6.1			
R57		49	0.146		85,506	12,513		12,513			40.3	5.9	40.3	5.9			
R58		50	0.141		85,506	12,032		12,032			40.3	5.7	40.3	5.7			
R59		51	0.135		85,506	11,569		11,569			40.3	5.5	40.3	5.5			
R60		52	0.130		85,506	11,124		11,124			40.3	5.2	40.3	5.2			
R61		53	0.125		85,506	10,696		10,696			40.3	5.0	40.3	5.0			
R62		54	0.120		85,506	10,285		10,285			40.3	4.8	40.3	4.8			
R63		55	0.116		85,506	9,889		9,889			40.3	4.7	40.3	4.7			
R64		56	0.111		85,506	9,509		9,509			40.3	4.5	40.3	4.5			
R65		57	0.107		85,506	9,143		9,143			40.3	4.3	40.3	4.3			
R66		58	0.103		85,506	8,791		8,791			40.3	4.1	40.3	4.1			
R67		59	0.099		85,506	8,453		8,453			40.3	4.0	40.3	4.0			
R68		60	0.095		85,506	8,128		8,128			40.3	3.8	40.3	3.8			
R69		61	0.091		85,506	7,816		7,816			40.3	3.7	40.3	3.7			
R70		62	0.088		85,506	7,515		7,515			40.3	3.5	40.3	3.5			
R71		63	0.085		85,506	7,226		7,226			40.3	3.4	40.3	3.4			
R72		64	0.081		85,506	6,948		6,948			40.3	3.3	40.3	3.3			
R73		65	0.078		85,506	6,681		6,681			40.3	3.1	40.3	3.1			
R74		66	0.075		85,506	6,424		6,424			40.3	3.0	40.3	3.0			
R75		67	0.072		85,506	6,177		6,177			40.3	2.9	40.3	2.9			
R76		68	0.069		85,506	5,939		5,939			40.3	2.8	40.3	2.8			
R77		69	0.067		85,506	5,711		5,711			40.3	2.7	40.3	2.7			
R78		70	0.064		85,506	5,491		5,491			40.3	2.6	40.3	2.6			
R79		71	0.062		85,506	5,280		5,280			40.3	2.5	40.3	2.5			
R80		72	0.059		85,506	5,077		5,077			40.3	2.4	40.3	2.4			
R81		73	0.057		85,506	4,882		4,882			40.3	2.3	40.3	2.3			
R82		74	0.055		85,506	4,694		4,694			40.3	2.2	40.3	2.2			
R83		75	0.053		85,506	4,513		4,513			40.3	2.1	40.3	2.1			
R84		76	0.051		85,506	4,340		4,340			40.3	2.0	40.3	2.0			
合計					5,293,205	1,174,554	4,199	1,178,753=B	139,092	83,517	2,559	593	141,651	84,110=C	14.0	1,094,642	53.4%

様式-5 費用対便益
全体事業(事業費+10%)

水系名:多摩川

河川名:多摩川、浅川

単位:百万円

年次	年度	t	割引率	デフレーター	便益			費用				費用便益比	純現在価値	経済的 内部 収益率			
					便益①		残存価値	計	建設費③		維持管理費④				計③+④		
					便益	現在価値	②	①×②	費用	現在価値	費用	現在価値	費用		現在価値		
基準	R08	0	1.000	1.000													
施設整備期間（30年）	R08	0	1.000	1.000	0	0		0	4,283	4,283	0.0	0.0	4,283	4,283			
	R09	1	0.962	1.000	2,176	2,092		2,092	4,283	4,118	1.6	1.5	4,285	4,120			
	R10	2	0.925	1.000	4,352	4,024		4,024	3,847	3,556	3.1	2.9	3,850	3,559			
	R11	3	0.889	1.000	6,528	5,803		5,803	3,847	3,420	4.7	4.1	3,851	3,424			
	R12	4	0.855	1.000	8,704	7,440		7,440	3,847	3,288	6.2	5.3	3,853	3,293			
	R13	5	0.822	1.000	10,880	8,942		8,942	3,847	3,162	7.8	6.4	3,854	3,168			
	R14	6	0.790	1.000	13,056	10,318		10,318	4,692	3,708	9.3	7.3	4,702	3,716			
	R15	7	0.760	1.000	15,232	11,575		11,575	4,479	3,403	10.9	8.2	4,489	3,412			
	R16	8	0.731	1.000	18,287	13,362		13,362	4,479	3,272	12.4	9.1	4,491	3,281			
	R17	9	0.703	1.000	21,342	14,995		14,995	4,479	3,147	14.0	9.8	4,492	3,156			
	R18	10	0.676	1.000	24,398	16,482		16,482	4,479	3,026	15.5	10.5	4,494	3,036			
	R19	11	0.650	1.000	27,453	17,833		17,833	4,479	2,909	17.1	11.1	4,496	2,920			
	R20	12	0.625	1.000	30,509	19,056		19,056	4,479	2,797	18.6	11.6	4,497	2,809			
	R21	13	0.601	1.000	33,564	20,158		20,158	5,822	3,496	20.2	12.1	5,842	3,509			
	R22	14	0.577	1.000	36,619	21,147		21,147	5,822	3,362	21.7	12.5	5,844	3,375			
	R23	15	0.555	1.000	39,675	22,030		22,030	5,822	3,233	23.3	12.9	5,845	3,246			
	R24	16	0.534	1.000	42,730	22,814		22,814	4,479	2,391	24.8	13.2	4,503	2,404			
	R25	17	0.513	1.000	45,785	23,505		23,505	4,479	2,299	26.4	13.5	4,505	2,313			
	R26	18	0.494	1.000	48,841	24,109		24,109	4,479	2,211	27.9	13.8	4,506	2,225			
	R27	19	0.475	1.000	51,896	24,632		24,632	4,479	2,126	29.5	14.0	4,508	2,140			
	R28	20	0.456	1.000	54,952	25,079		25,079	6,211	2,834	31.0	14.1	6,242	2,849			
	R29	21	0.439	1.000	58,007	25,455		25,455	6,211	2,725	32.6	14.3	6,243	2,740			
	R30	22	0.422	1.000	61,062	25,766		25,766	6,211	2,621	34.1	14.4	6,245	2,635			
	R31	23	0.406	1.000	64,118	26,014		26,014	6,211	2,520	35.7	14.5	6,246	2,534			
	R32	24	0.390	1.000	67,173	26,206		26,206	6,211	2,423	37.2	14.5	6,248	2,437			
	R33	25	0.375	1.000	70,229	26,344		26,344	6,211	2,330	38.8	14.5	6,249	2,344			
	R34	26	0.361	1.000	73,284	26,433		26,433	6,211	2,240	40.3	14.5	6,251	2,255			
	R35	27	0.347	1.000	76,339	26,476		26,476	6,211	2,154	41.9	14.5	6,252	2,168			
	R36	28	0.333	1.000	79,395	26,476		26,476	6,211	2,071	43.4	14.5	6,254	2,086			
	R37	29	0.321	1.000	82,450	26,438		26,438	6,211	1,991	45.0	14.4	6,255	2,006			
	施設完成後の評価期間（50年）	R38	30	0.308		85,506	26,363		26,363			45.0	13.9	45.0	13.9		
		R39	31	0.296		85,506	25,349		25,349			45.0	13.3	45.0	13.3		
		R40	32	0.285		85,506	24,374		24,374			45.0	12.8	45.0	12.8		
		R41	33	0.274		85,506	23,437		23,437			45.0	12.3	45.0	12.3		
		R42	34	0.264		85,506	22,535		22,535			45.0	11.8	45.0	11.8		
		R43	35	0.253		85,506	21,668		21,668			45.0	11.4	45.0	11.4		
		R44	36	0.244		85,506	20,835		20,835			45.0	11.0	45.0	11.0		
R45		37	0.234		85,506	20,034		20,034			45.0	10.5	45.0	10.5			
R46		38	0.225		85,506	19,263		19,263			45.0	10.1	45.0	10.1			
R47		39	0.217		85,506	18,522		18,522			45.0	9.7	45.0	9.7			
R48		40	0.208		85,506	17,810		17,810			45.0	9.4	45.0	9.4			
R49		41	0.200		85,506	17,125		17,125			45.0	9.0	45.0	9.0			
R50		42	0.193		85,506	16,466		16,466			45.0	8.7	45.0	8.7			
R51		43	0.185		85,506	15,833		15,833			45.0	8.3	45.0	8.3			
R52		44	0.178		85,506	15,224		15,224			45.0	8.0	45.0	8.0			
R53		45	0.171		85,506	14,638		14,638			45.0	7.7	45.0	7.7			
R54		46	0.165		85,506	14,075		14,075			45.0	7.4	45.0	7.4			
R55		47	0.158		85,506	13,534		13,534			45.0	7.1	45.0	7.1			
R56		48	0.152		85,506	13,013		13,013			45.0	6.8	45.0	6.8			
R57		49	0.146		85,506	12,513		12,513			45.0	6.6	45.0	6.6			
R58		50	0.141		85,506	12,032		12,032			45.0	6.3	45.0	6.3			
R59		51	0.135		85,506	11,569		11,569			45.0	6.1	45.0	6.1			
R60		52	0.130		85,506	11,124		11,124			45.0	5.8	45.0	5.8			
R61		53	0.125		85,506	10,696		10,696			45.0	5.6	45.0	5.6			
R62		54	0.120		85,506	10,285		10,285			45.0	5.4	45.0	5.4			
R63		55	0.116		85,506	9,889		9,889			45.0	5.2	45.0	5.2			
R64		56	0.111		85,506	9,509		9,509			45.0	5.0	45.0	5.0			
R65		57	0.107		85,506	9,143		9,143			45.0	4.8	45.0	4.8			
R66		58	0.103		85,506	8,791		8,791			45.0	4.6	45.0	4.6			
R67		59	0.099		85,506	8,453		8,453			45.0	4.4	45.0	4.4			
R68		60	0.095		85,506	8,128		8,128			45.0	4.3	45.0	4.3			
R69		61	0.091		85,506	7,816		7,816			45.0	4.1	45.0	4.1			
R70		62	0.088		85,506	7,515		7,515			45.0	4.0	45.0	4.0			
R71		63	0.085		85,506	7,226		7,226			45.0	3.8	45.0	3.8			
R72		64	0.081		85,506	6,948		6,948			45.0	3.7	45.0	3.7			
R73		65	0.078		85,506	6,681		6,681			45.0	3.5	45.0	3.5			
R74		66	0.075		85,506	6,424		6,424			45.0	3.4	45.0	3.4			
R75		67	0.072		85,506	6,177		6,177			45.0	3.2	45.0	3.2			
R76		68	0.069		85,506	5,939		5,939			45.0	3.1	45.0	3.1			
R77		69	0.067		85,506	5,711		5,711			45.0	3.0	45.0	3.0			
R78		70	0.064		85,506	5,491		5,491			45.0	2.9	45.0	2.9			
R79		71	0.062		85,506	5,280		5,280			45.0	2.8	45.0	2.8			
R80		72	0.059		85,506	5,077		5,077			45.0	2.7	45.0	2.7			
R81		73	0.057		85,506	4,882		4,882			45.0	2.6	45.0	2.6			
R82		74	0.055		85,506	4,694		4,694			45.0	2.5	45.0	2.5			
R83		75	0.053		85,506	4,513		4,513			45.0	2.4	45.0	2.4			
R84		76	0.051		85,506	4,340		4,340			45.0	2.3	45.0	2.3			
R85		77	0.049		85,506	4,173		4,173			45.0	2.2	45.0	2.2			
R86		78	0.047		85,506	4,012		4,012			45.0	2.1	45.0	2.1			
R87		79	0.045		85,506	3,858		3,858			45.0	2.0	45.0	2.0			
合計					5,444,311	1,139,991	4,106	1,144,097=B	153,001	87,117	2,922	634	155,923	87,751=C	13.0	1,056,346	53.4%

様式-5 費用対便益
全体事業(事業費-10%)

水系名:多摩川

河川名:多摩川、浅川

単位:百万円

年次	年度	t	割引率	デフレーター	便益			費用				費用便益比	純現在価値	経済的 内部 収益率			
					便益①		残存価値	計	建設費③		維持管理費④				計③+④		
					便益	現在価値	②	①×②	費用	現在価値	費用	現在価値	費用		現在価値		
基準	R08	0	1.000	1.000													
施設整備期間（30年）	R08	0	1.000	1.000	0	0		0	3,504	3,504	0.0	0.0	3,504	3,504			
	R09	1	0.962	1.000	2,176	2,092		2,092	3,504	3,370	1.6	1.5	3,506	3,371			
	R10	2	0.925	1.000	4,352	4,024		4,024	3,147	2,910	3.1	2.9	3,150	2,913			
	R11	3	0.889	1.000	6,528	5,803		5,803	3,147	2,798	4.7	4.1	3,152	2,802			
	R12	4	0.855	1.000	8,704	7,440		7,440	3,147	2,690	6.2	5.3	3,153	2,696			
	R13	5	0.822	1.000	10,880	8,942		8,942	3,147	2,587	7.8	6.4	3,155	2,593			
	R14	6	0.790	1.000	13,056	10,318		10,318	3,839	3,034	9.3	7.3	3,848	3,042			
	R15	7	0.760	1.000	15,232	11,575		11,575	3,664	2,785	10.9	8.2	3,675	2,793			
	R16	8	0.731	1.000	18,287	13,362		13,362	3,664	2,677	12.4	9.1	3,677	2,687			
	R17	9	0.703	1.000	21,342	14,995		14,995	3,664	2,574	14.0	9.8	3,678	2,584			
	R18	10	0.676	1.000	24,398	16,482		16,482	3,664	2,475	15.5	10.5	3,680	2,486			
	R19	11	0.650	1.000	27,453	17,833		17,833	3,664	2,380	17.1	11.1	3,681	2,391			
	R20	12	0.625	1.000	30,509	19,056		19,056	3,664	2,289	18.6	11.6	3,683	2,300			
	R21	13	0.601	1.000	33,564	20,158		20,158	4,763	2,861	20.2	12.1	4,784	2,873			
	R22	14	0.577	1.000	36,619	21,147		21,147	4,763	2,751	21.7	12.5	4,785	2,763			
	R23	15	0.555	1.000	39,675	22,030		22,030	4,763	2,645	23.3	12.9	4,787	2,658			
	R24	16	0.534	1.000	42,730	22,814		22,814	3,664	1,956	24.8	13.2	3,689	1,970			
	R25	17	0.513	1.000	45,785	23,505		23,505	3,664	1,881	26.4	13.5	3,691	1,895			
	R26	18	0.494	1.000	48,841	24,109		24,109	3,664	1,809	27.9	13.8	3,692	1,823			
	R27	19	0.475	1.000	51,896	24,632		24,632	3,664	1,739	29.5	14.0	3,694	1,753			
	R28	20	0.456	1.000	54,952	25,079		25,079	5,081	2,319	31.0	14.1	5,112	2,333			
	R29	21	0.439	1.000	58,007	25,455		25,455	5,081	2,230	32.6	14.3	5,114	2,244			
	R30	22	0.422	1.000	61,062	25,766		25,766	5,081	2,144	34.1	14.4	5,115	2,158			
	R31	23	0.406	1.000	64,118	26,014		26,014	5,081	2,062	35.7	14.5	5,117	2,076			
	R32	24	0.390	1.000	67,173	26,206		26,206	5,081	1,982	37.2	14.5	5,119	1,997			
	R33	25	0.375	1.000	70,229	26,344		26,344	5,081	1,906	38.8	14.5	5,120	1,921			
	R34	26	0.361	1.000	73,284	26,433		26,433	5,081	1,833	40.3	14.5	5,122	1,847			
	R35	27	0.347	1.000	76,339	26,476		26,476	5,081	1,762	41.9	14.5	5,123	1,777			
	R36	28	0.333	1.000	79,395	26,476		26,476	5,081	1,695	43.4	14.5	5,125	1,709			
	R37	29	0.321	1.000	82,450	26,438		26,438	5,081	1,629	45.0	14.4	5,126	1,644			
	施設完成後の評価期間（50年）	R38	30	0.308		85,506	26,363		26,363			45.0	13.9	45.0	13.9		
		R39	31	0.296		85,506	25,349		25,349			45.0	13.3	45.0	13.3		
		R40	32	0.285		85,506	24,374		24,374			45.0	12.8	45.0	12.8		
		R41	33	0.274		85,506	23,437		23,437			45.0	12.3	45.0	12.3		
		R42	34	0.264		85,506	22,535		22,535			45.0	11.8	45.0	11.8		
		R43	35	0.253		85,506	21,668		21,668			45.0	11.4	45.0	11.4		
		R44	36	0.244		85,506	20,835		20,835			45.0	11.0	45.0	11.0		
R45		37	0.234		85,506	20,034		20,034			45.0	10.5	45.0	10.5			
R46		38	0.225		85,506	19,263		19,263			45.0	10.1	45.0	10.1			
R47		39	0.217		85,506	18,522		18,522			45.0	9.7	45.0	9.7			
R48		40	0.208		85,506	17,810		17,810			45.0	9.4	45.0	9.4			
R49		41	0.200		85,506	17,125		17,125			45.0	9.0	45.0	9.0			
R50		42	0.193		85,506	16,466		16,466			45.0	8.7	45.0	8.7			
R51		43	0.185		85,506	15,833		15,833			45.0	8.3	45.0	8.3			
R52		44	0.178		85,506	15,224		15,224			45.0	8.0	45.0	8.0			
R53		45	0.171		85,506	14,638		14,638			45.0	7.7	45.0	7.7			
R54		46	0.165		85,506	14,075		14,075			45.0	7.4	45.0	7.4			
R55		47	0.158		85,506	13,534		13,534			45.0	7.1	45.0	7.1			
R56		48	0.152		85,506	13,013		13,013			45.0	6.8	45.0	6.8			
R57		49	0.146		85,506	12,513		12,513			45.0	6.6	45.0	6.6			
R58		50	0.141		85,506	12,032		12,032			45.0	6.3	45.0	6.3			
R59		51	0.135		85,506	11,569		11,569			45.0	6.1	45.0	6.1			
R60		52	0.130		85,506	11,124		11,124			45.0	5.8	45.0	5.8			
R61		53	0.125		85,506	10,696		10,696			45.0	5.6	45.0	5.6			
R62		54	0.120		85,506	10,285		10,285			45.0	5.4	45.0	5.4			
R63		55	0.116		85,506	9,889		9,889			45.0	5.2	45.0	5.2			
R64		56	0.111		85,506	9,509		9,509			45.0	5.0	45.0	5.0			
R65		57	0.107		85,506	9,143		9,143			45.0	4.8	45.0	4.8			
R66		58	0.103		85,506	8,791		8,791			45.0	4.6	45.0	4.6			
R67		59	0.099		85,506	8,453		8,453			45.0	4.4	45.0	4.4			
R68		60	0.095		85,506	8,128		8,128			45.0	4.3	45.0	4.3			
R69		61	0.091		85,506	7,816		7,816			45.0	4.1	45.0	4.1			
R70		62	0.088		85,506	7,515		7,515			45.0	4.0	45.0	4.0			
R71		63	0.085		85,506	7,226		7,226			45.0	3.8	45.0	3.8			
R72		64	0.081		85,506	6,948		6,948			45.0	3.7	45.0	3.7			
R73		65	0.078		85,506	6,681		6,681			45.0	3.5	45.0	3.5			
R74		66	0.075		85,506	6,424		6,424			45.0	3.4	45.0	3.4			
R75		67	0.072		85,506	6,177		6,177			45.0	3.2	45.0	3.2			
R76		68	0.069		85,506	5,939		5,939			45.0	3.1	45.0	3.1			
R77		69	0.067		85,506	5,711		5,711			45.0	3.0	45.0	3.0			
R78		70	0.064		85,506	5,491		5,491			45.0	2.9	45.0	2.9			
R79		71	0.062		85,506	5,280		5,280			45.0	2.8	45.0	2.8			
R80		72	0.059		85,506	5,077		5,077			45.0	2.7	45.0	2.7			
R81		73	0.057		85,506	4,882		4,882			45.0	2.6	45.0	2.6			
R82		74	0.055		85,506	4,694		4,694			45.0	2.5	45.0	2.5			
R83		75	0.053		85,506	4,513		4,513			45.0	2.4	45.0	2.4			
R84		76	0.051		85,506	4,340		4,340			45.0	2.3	45.0	2.3			
R85		77	0.049		85,506	4,173		4,173			45.0	2.2	45.0	2.2			
R86		78	0.047		85,506	4,012		4,012			45.0	2.1	45.0	2.1			
R87		79	0.045		85,506	3,858		3,858			45.0	2.0	45.0	2.0			
合計					5,444,311	1,139,991	3,359	1,143,350=B	125,183	71,278	2,922	634	128,105	71,911=C	15.9	1,071,438	64.7%

事業費の内訳書

河川事業

事業名	多摩川河川改修事業（全体事業費）
-----	------------------

評価年度	令和7年度	新規事業採択時評価
------	-------	-----------

区分	費目	工種	単位	数量	金額 (百万円)	備考
工事費			式	1	117,693	
	本工事費及び附帯工事費		式	1	117,693	
		河道掘削	万m3	516	81,439	
		築堤	m3	100,063	4,769	
		高さ不足	m3	20,885	995	
		高潮対策	km	0	1,151	
		浸透対策	km	0.0	0	
		高水護岸	km	4.4	7,213	
		水衝部対策	km	7.6	15,234	
		高規格堤防	箇所	0	621	
		樋門	箇所	1	92	
		橋梁対策	箇所	1	3,100	
		床止対策	箇所	2	680	
		防災ステーション	箇所	1	672	
		緊急用河川敷道路	km	52	1,728	
間接経費		式	1	35,308		
事業費(工事諸費除く) 計				153,001		
工事諸費		式	1	30,600		
事業費(工事諸費含む) 計		式	1	183,602		
維持管理費			式	1	742	30年